

Rev	AWO #	Description	Date	Appr
-		RELEASED	10/07/09	


APPROVED: _____


DATE: _____ TITLE: _____




FFC/FPC DIMENSION
THICKNESS 0.3±0.05mm
TOLERANCE:0.05mm

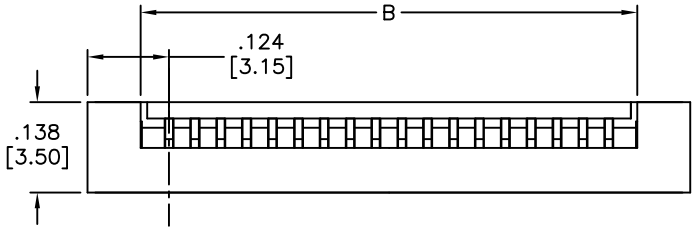

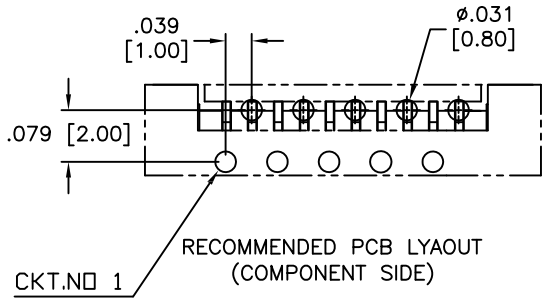

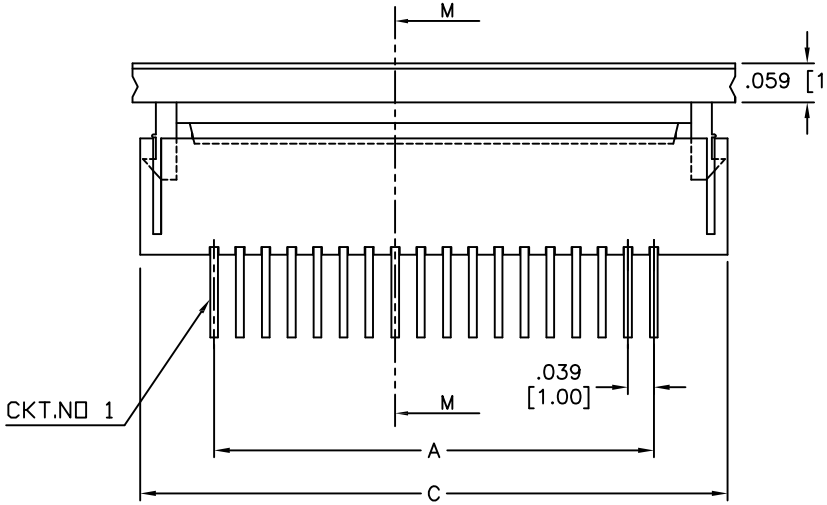

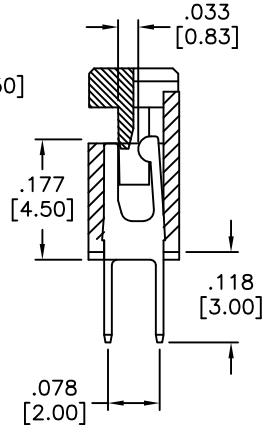

SECTION M–M

Postitions: 3 thru 30
A = .039 [1.00] x No. of Spaces
B = A + .087 [2.20]
C = A + .236 [6.00]

SPECIFICATIONS:
Material:
Housing: LCP, rated UL 94V–0
Housing color: Natural
Terminal: Phosphor Bronze
Plating:
Tin over Copper underplate overall
Electrical:
Operating voltage: 50 VAC max
Current rating: 0.5 Amps max
Contact resistance: 30 mohms max initial
Insulation resistance: 500 Mohms min
Dielectric withstanding voltage: 500 VAC for 1 minute
Temperature Rating:
Operating temperature: –40°C to +85°C
Environmetal:
Lead free, RoHS compliant.

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	DY	10/07/09
CHECKED		
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: ZIF FLEX CIRCUIT CONNECTOR
1.00MM PITCH, TOP ENTRY, DIP TYPE

SIZE	PART NO.	REV.
X	PCA-3-XX-V-3-20	-

REF: S00030T | SCALE: NTS | SHEET 1 OF 1