


APPROVED: _____

DATE: _____ TITLE: _____


Rev	AWO #	Description	Date	Appr
-		RELEASED	11/18/22	
A		UPDATE DIM.	11/22/22	LH/YC

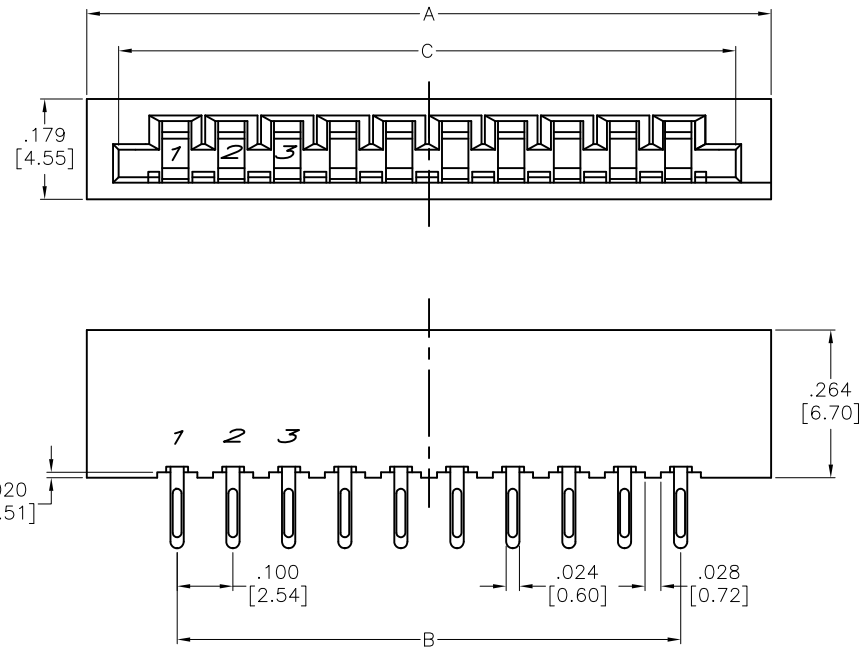





RECOMMENDED PCB LAYOUT

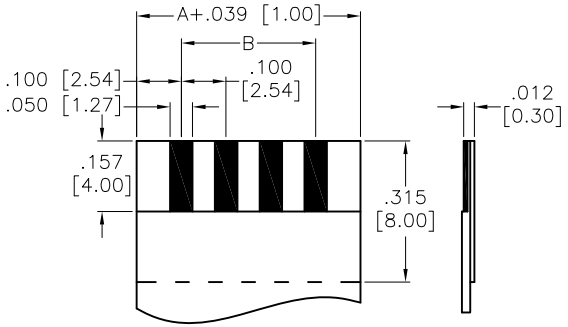

RECOMMENDED FFC/FPC

SPECIFICATIONS:
Material:
Insulator: PBT, Glass reinforced, rated UL 94V–0
Insulator color: Black
Contacts: Phosphor Bronze
Plating:
Tin over Copper underplate overall
Electrical:
Current rating: 3.0 Amp
Contact resistance: 30 mohms max
Insulation resistance: 1000 Mohms min
Dielectric withstanding voltage: 1000 V RMS
Temperature Rating:
–55°C to +85°C
Environmental:
Lead free, RoHS compliant RoHS COMPLIANT

⚠
Positions: 02 thru 20
A= .100 [2.54] x No. of Positions + .223 [5.66]
B= .100 [2.54] x No. of Space
C= .100 [2.54] x No. of Positions + .120 [3.06]

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]. TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

DRAWN	LH	11/18/22
CHECKED	YC	11/18/22
APPROVED		

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN PERMISSION FROM ADAM TECH

ADAM TECH
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE: LIF FLEX CIRCUIT CONNECTOR
TOP ENTRY, 2.54 MM PCB ROW SPACING

SIZE	PART NO.	REV.
X	PCB-A2-XX-T	A

REF: S00167T | SCALE: NTS | SHEET 1 OF 1