


APPROVED: _____


DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	10/09/08	
A		REDRAWN	6/10/09	
B		REVISED SPEC.	10/22/10	
C		UPDATE DIM.	3/16/23	LH/LL1

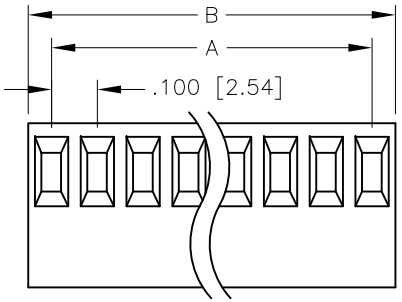

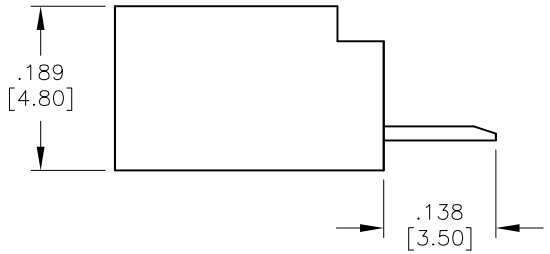

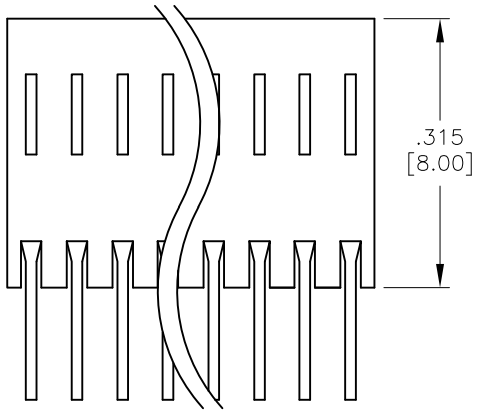

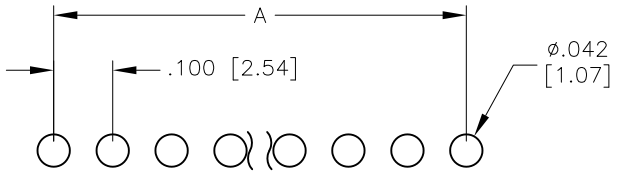

RECOMMENDED PCB LAYOUT

SPECIFICATIONS:
Material:
Insulator: Nylon 66, rated UL 94V–0
Insulator color: White
Contacts: Phosphor Bronze
Plating:
Tin over Copper underplate overall
Electrical:
Operating voltage: 250 VAC max.
Current rating: 2.5 Amps max.
Contact resistance: 20 mohms max. initial
Dielectric withstanding voltage: 1,500 VAC for 1 minute
Temperature Rating:
Operating temperature: 0°C to +75°C
Environmental:
Lead free, RoHS compliant

Positions: 02 thru 25
A = .100 [2.54] x No. of Spaces
B = .100 [2.54] x No. of Positions + .004 [0.10]

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]. TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

ADAM TECH
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

DRAWN	SS	10/09/08
CHECKED		
APPROVED		

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN PERMISSION FROM ADAM TECH

TITLE: .100 [2.54] PCB CONNECTOR
NO HOOKS, TOP ENTRY

SIZE	PART NO.	REV.
X	PCE-A-XX-NH	C

REF:	SCALE:	SHEET
S00123T	NTS	1 OF 1