
Rev	AWO #	Description	Date	Appr
-		RELEASED	11/27/14	

APPROVED: _____

DATE: _____ TITLE: _____

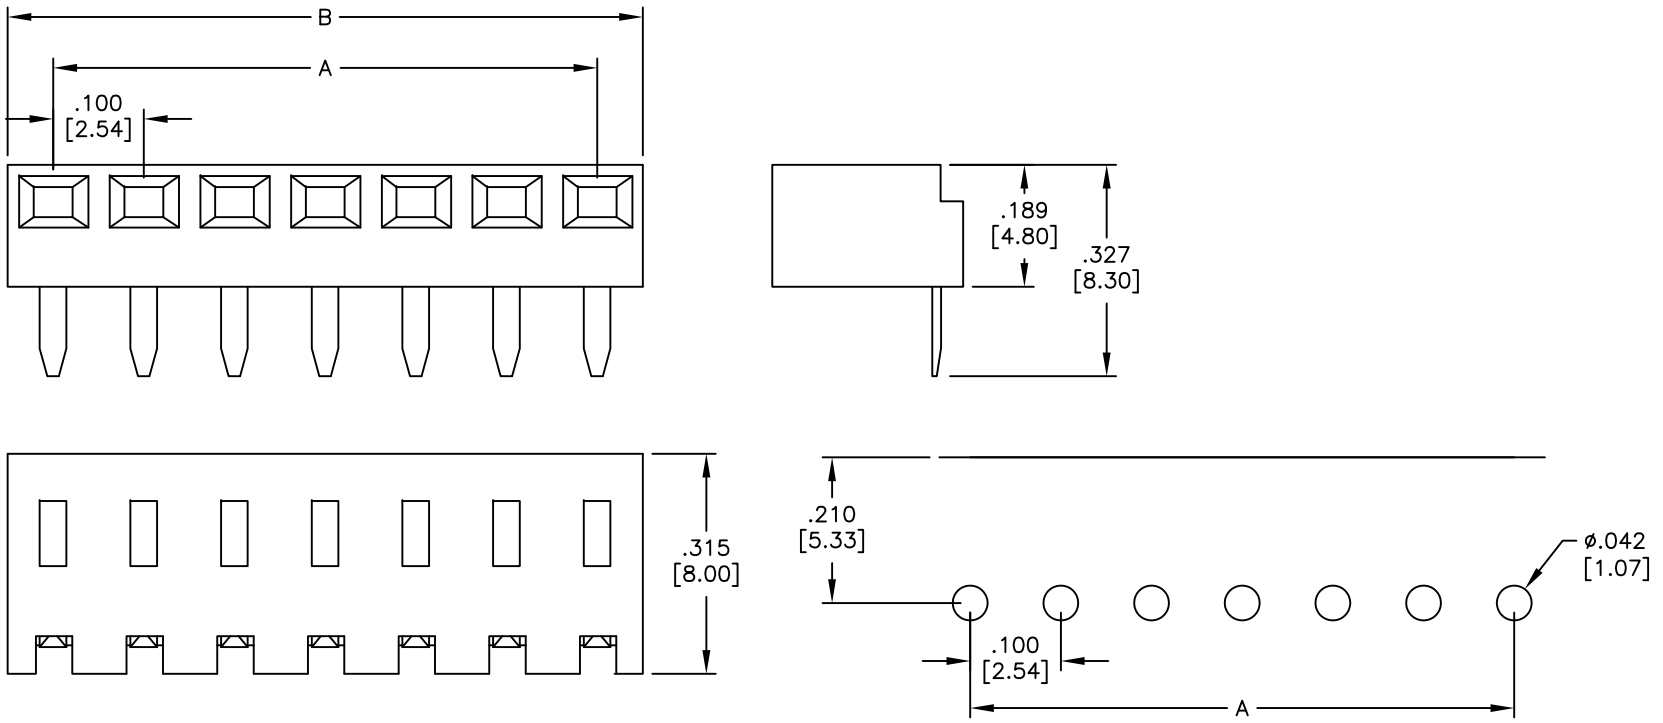

RECOMMENDED PCB LAYOUT

SPECIFICATIONS:
Material:
Insulator: Nylon, rated UL 94V-2
Insulator color: White
Contacts: Brass
Plating:
Tin over Copper underplate overall
Electrical:
Operating voltage: 250 VAC max.
Current rating: 2.5 Amps max.
Contact resistance: 20 mohms max. initial
Insulation resistance: 500 Mohms min.
Dielectric withstanding voltage: 1,500 VAC for 1 minute
Temperature Rating:
Operating temperature: 0°C to +75°C
Environmental:
Lead free, RoHS compliant

RoHS COMPLIANT

Positions: 02 thru 29
A = .100 [2.54] x No. of Spaces
B = .100 [2.54] x No. of Spaces + .101 [2.56]

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	AY	11/27/14
CHECKED	LW	11/27/14
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE
.100 [2.54] PCB CONNECTOR
BOARD HOOKS, SIDE ENTRY

SIZE	PART NO.	REV.
X	PCE-B1-XX-NH-V2	-

REF:	SCALE:	SHEET
S00099T	NTS	1 OF 1