
Rev	AWO #	Description	Date	Appr
-		RELEASED	1/11/19	

APPROVED: _____

DATE: _____ TITLE: _____

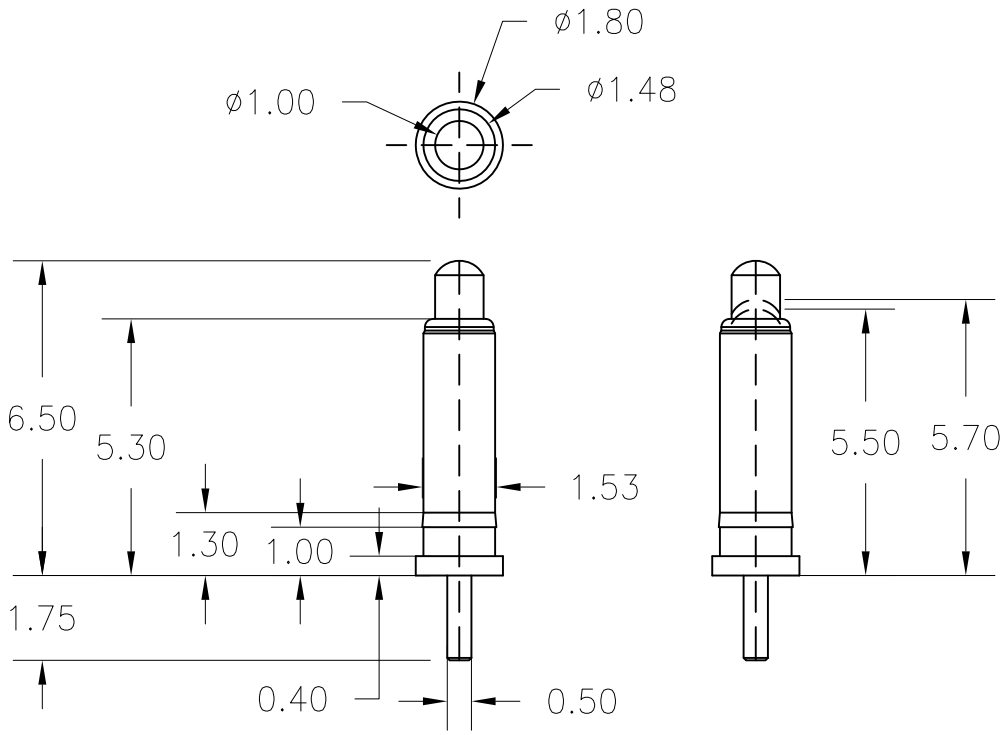

SPECIFICATIONS:

Material:

Contact: Brass, 5u" Gold plated over Nickel

Spring: SUS

Electrical:

Rated Voltage (per Contact): 12 Volts

Rated Current (per Contact): 3 A max

Mechanical:

Working Stroke & Force (per Contact) : 50±20gf (Stroke 1)
80±20gf (Stroke 2)

Durability: 30,000 Cycles min

Temperature Rating:

Operating temperature: −30°C to +85°C

Environmental:

Lead free, RoHS compliant.

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE MILLIMETERS
TOLERANCES: EXCEPT AS NOTED
MM ±.15
ANGLE ±2°

APPROVALS		DATE
DRAWN	HR	1/11/19
CHECKED	TW	1/11/19
APPROVED		

ADAM TECH INTERCONNECTS
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE: PCB DIP SPRING LOADED PIN, STRAIGHT

SIZE	PART NO.	REV.
X	PH-MVP-5365-C1	-

REF: S00185C | SCALE: NTS | SHEET 1 OF 1