





Rev	AWO #	Description	Date	Appr
-		RELEASED	9/16/13	

APPROVED: _____

DATE: _____ TITLE: _____



RECOMMENDED PCB LAYOUT

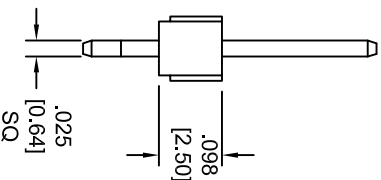

SPECIFICATIONS:

Material:

Insulator: Hi-temp thermoplastic, rated UL 94V-0

Insulator color: Black

Contacts: Brass

Plating:

Gold Flash over Nickel underplate overall

Electrical:

Current rating: 3 Amps max

Contact resistance: 20 mohms max

Insulation resistance: 5000 Mohms min @ 500 VDC

Dielectric withstanding voltage: 500 VAC for 1 minute

Temperature Rating:

Operating temperature: -40°C to +105°C

Environmental:

Lead free, RoHS compliant.



ADAM TECH

909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE
PIN HEADER, SINGLE ROW, 1 PIN
STRAIGHT, KINK PIN

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES HOLES .X ± .10 ØX ± .10 .XX ± .020 ØXX ± .015 .XXX ± .015 ØXXX ± .010				909 Railway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710			
APPROVALS				TITLE			
DATE				PIN HEADER, SINGLE ROW, 1 PIN			
DRAWN AY				STRAIGHT, KINK PIN			
9/16/13							
CHECKED AH				SIZE PART NO.			
9/16/13				PH1-01-UA-HT-K			
APPROVED				REV.			
				-			
REF: S00059T				SCALE: NTS SHEET 1 OF 1			