
Rev	AWO #	Description	Date	Appr
-		RELEASED	8/25/16	

APPROVED: _____

DATE: _____ TITLE: _____

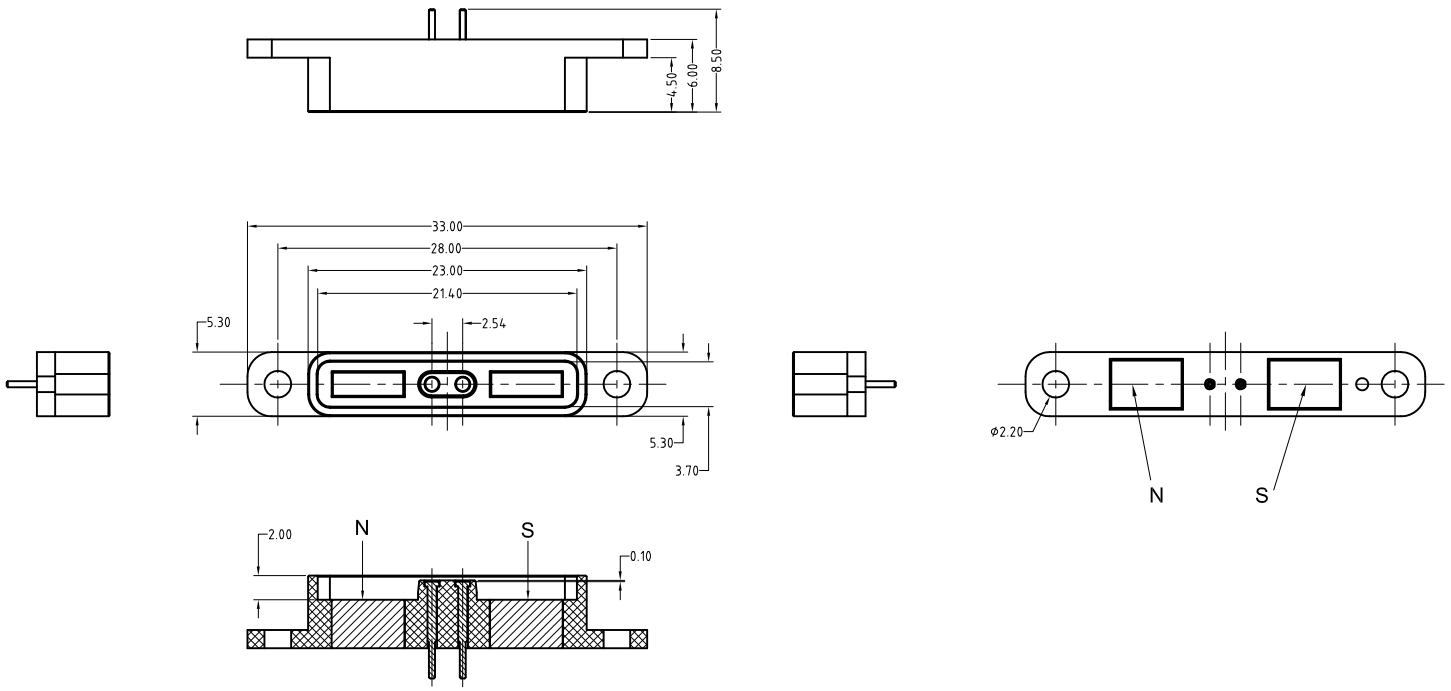

Mating with: CA-USBAM-PH-3E02-MVCC

SPECIFICATIONS:
Material:
Insulator: HTN, rated UL 94V-0
Insulator color: Black
Contact: Pogo pin, 5u" Gold plated
Magnet: N52 NdFeB, Ni-Cu-Ni plated
Electrical:
Rating Current & Voltage rating: 12VDC, 3A
Contact resistance: 50 mohms max
Environmental:
Lead free, RoHS compliant.

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE MILLIMETERS
TOLERANCES: EXCEPT AS NOTED

MM		HOLES	
.X	± .25		
.XX	± .15	Ø.XX	±.15
.XXX	± .05		

APPROVALS		DATE
DRAWN	HR	8/25/16
CHECKED	CK	8/25/16
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: 2.54MM PITCH POGO PIN, FEMALE, 2P SINGLE ROW, MAGNET, STRAIGHT

SIZE	PART NO.	REV.
X	PH1-3E-02-FVMP-6085	-

REF: S00170C | SCALE: NTS | SHEET 1 OF 1