


APPROVED: _____


DATE: _____ TITLE: _____


Rev	AWO #	Description	Date	Appr
-		RELEASED	10/18/18	
A		UPDATE SPEC.	10/23/19	AY/KC




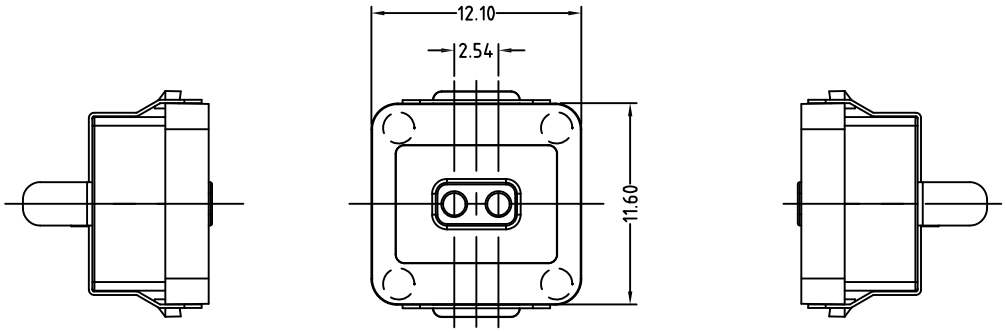




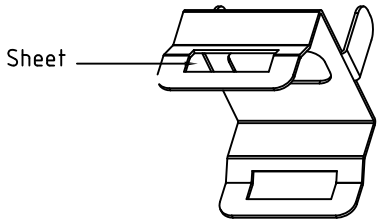

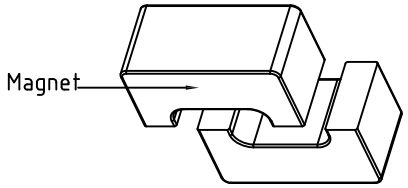

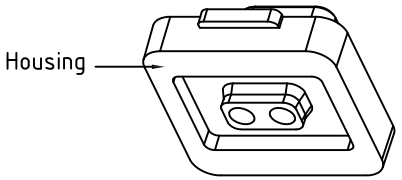



Mating with: CA-ST2-PH1-25410-M
CA #AN15172-X

SPECIFICATIONS:
Material:
Housing: Hi-Temp Thermoplastic, rated UL 94V-0
Contact: Brass, 10u" Gold plated over Nickel
Magnet: N48, Nickel plated
Sheet: Stainless Steel
Electrical:
Rating Current & Voltage (Per Contact): DC12V, 1A
Contact resistance: 50 mohms max
Environmental:
Lead free, RoHS compliant.

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE MILLIMETERS
TOLERANCES: EXCEPT AS NOTED

Millimeters	ANGEL
30-150 ± 0.15	±1°
6-30 ± 0.10	
0-6 ± 0.05	

APPROVALS		DATE
DRAWN	HR	10/18/18
CHECKED	CK	10/18/18
APPROVED		

ADAM TECH INTERCONNECTS
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE: POGO PIN CONNECTOR, 2.54MM PITCH FEMALE, 2P, STRAIGHT

SIZE	PART NO.	REV.
X	PH1-3F-02-FVMP-6910	A

REF: S00170C | SCALE: NTS | SHEET 1 OF 1