
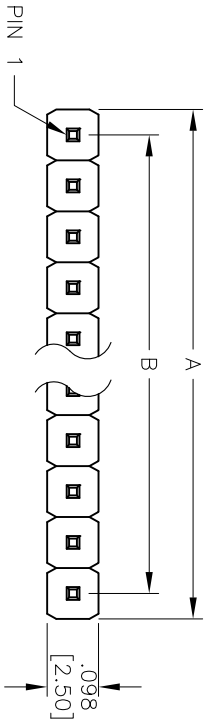




Rev	AWO #	Description	Date	Appr
-		RELEASED	4/8/15	

APPROVED: _____

DATE: _____ TITLE: _____

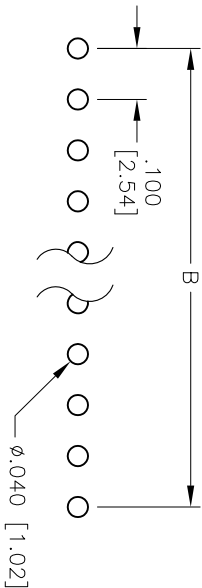

Recommended PCB Layout

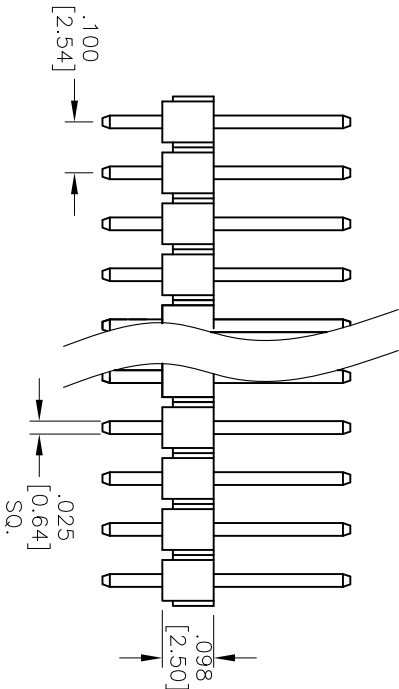

SPECIFICATIONS:

Material:

Insulator: PBT, glass reinforced, rated UL 94V-0

Insulator color: Black

Contacts: Brass

Plating:

Gold flash over Nickel underplate on contact area,

Matte Tin over Copper underplate on tails.

Electrical:

Current rating: 3 Amps max

Contact resistance: 20 mohms max

Insulation resistance: 5,000 Mohms min @ 500 VDC

Dielectric withstanding voltage: 500 VAC for 1 minute

Temperature Rating:

Operating temperature: -40°C to +105°C

Environmental:

Lead free, RoHS compliant



Positions: 2 thru 40

A = .100 [2.54] x No. of Positions

B = .100 [2.54] x No. of Spaces

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES				HOLES			
.X	± .10	ØX	± .10	.X	± .10	ØX	± .10
.XX	± .020	ØXX	± .015	.XX	± .015	ØXX	± .010
.XXX	± .015	ØXXX	± .010	.XXX	± .015	ØXXX	± .010
APPROVALS				DATE			
DRAWN	AY		4/8/15				
CHECKED	KW		4/8/15				
APPROVED							