



Rev	AWO #	Description	Date	Appr
-		RELEASED	11/21/13	

APPROVED: _____

DATE: _____ TITLE: _____

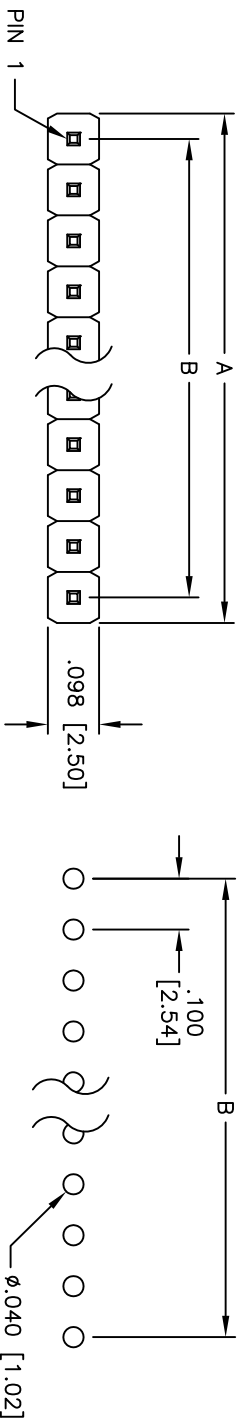

Recommended PCB Layout

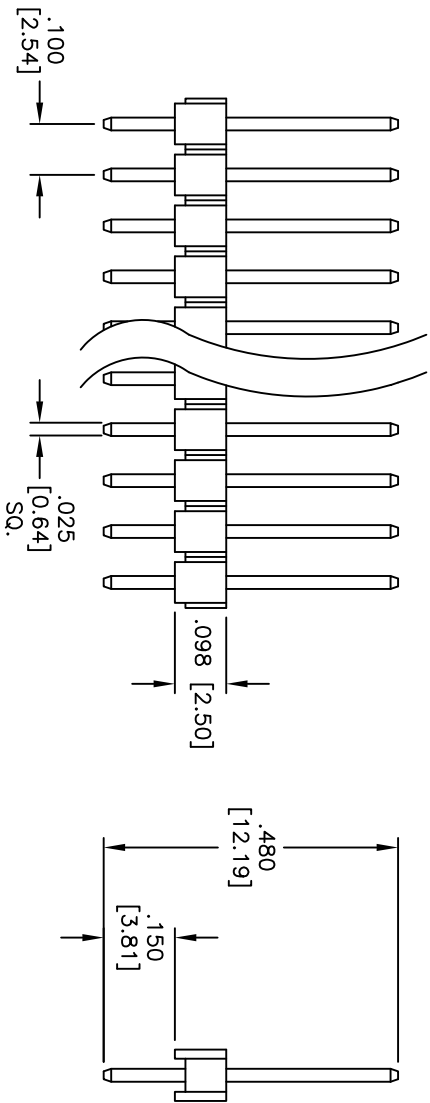

SPECIFICATIONS:

Material:

Insulator: PBT, glass reinforced, rated UL 94V-0

Insulator color: Black

Contacts: Brass

Plating:

Gold flash over Nickel underplate overall

Electrical:

Current rating: 3 Amps max

Insulation resistance: 20 mohms max

Dielectric withstanding voltage: 500 VAC for 1 minute

Temperature Rating:

Operating temperature: -40°C to +105°C

Environmental:

Lead free, RoHS compliant

Positions: 2 thru 40
A = .100 [2.54] x No. of Positions
B = .100 [2.54] x No. of Spaces

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED			ADAM TECH 909 Rahway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710		
INCHES			Holes		
.X ± .10			ØX ± .10		
.XX ± .020			ØXX ± .015		
.XXX ± .015			ØXXX ± .010		
APPROVALS			DATE		
DRAWN	HR	11/21/13	TITLE .100 [2.54] SINGLE ROW PIN HEADER GOLD PLATED		
CHECKED	AL	11/21/13			
APPROVED					
SIZE			REV.		
X			-		
REF: S00039T			SCALE: NTS		
SHEET 1 OF 1					