
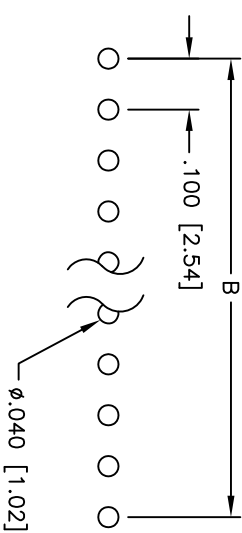




Rev	AWO #	Description	Date	Appr
-		RELEASED	10/10/07	

APPROVED: _____

DATE: _____ TITLE: _____

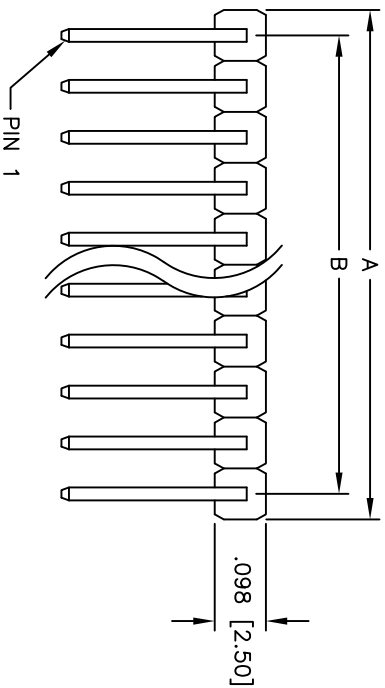

PCB LAYOUT

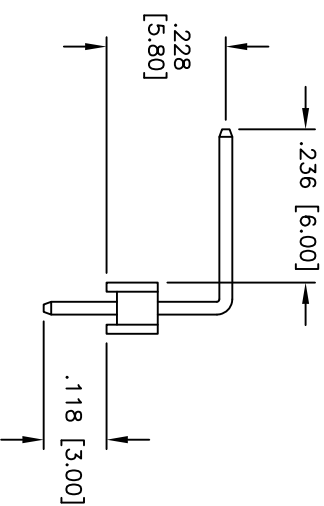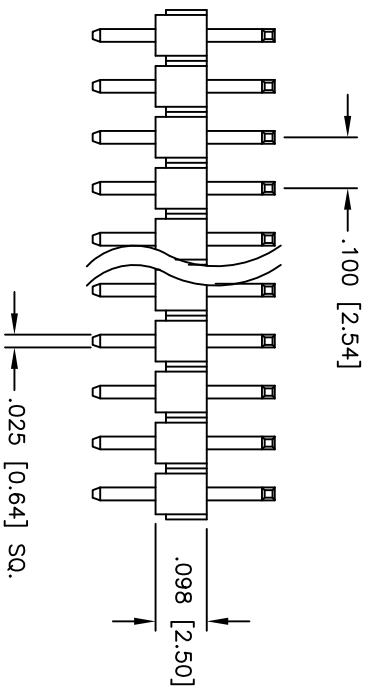

SPECIFICATIONS:

Material:

Insulator: PBT, glass reinforced, rated UL 94V-0

Insulator color: Black

Contacts: Brass

Plating:

Tin over Copper underplate overall

Electrical:

Current rating: 3 Amps max

Contact resistance: 20 mohms max

Insulation resistance: 5,000 Mohms min @ 500 VDC

Temperature Rating:

Operating temperature: -40°C to +105°C

Environmental:

Lead free, RoHS compliant



Positions: 02 thru 40
A = .100 [2.54] x No. of Positions
B = .100 [2.54] x No. of Positions - 1

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED		TITLE .100 [2.54] SINGLE ROW PIN HEADER RIGHT ANGLE, HIGH PROFILE, TIN PLATED	
INCHES	HOLES	909 Railway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710	
.X ± .10	ØX ± .10	ADAM TECH	
.XX ± .020	ØXX ± .015		
.XXX ± .015	ØXXX ± .010		
APPROVALS	DATE	PART NO. PH1RA-XX-TA	
DRAWN SS	10/10/07	REV. -	
CHECKED		SCALE: NTS	
APPROVED		SHEET 1 OF 1	