
Rev	AWO #	Description	Date	Appr
-		RELEASED	1/28/13	

APPROVED: _____

DATE: _____ TITLE: _____

CUSTOM CABLE ASSEMBLIES ARE
NON–CANCELLABLE/NON–RETURNABLE

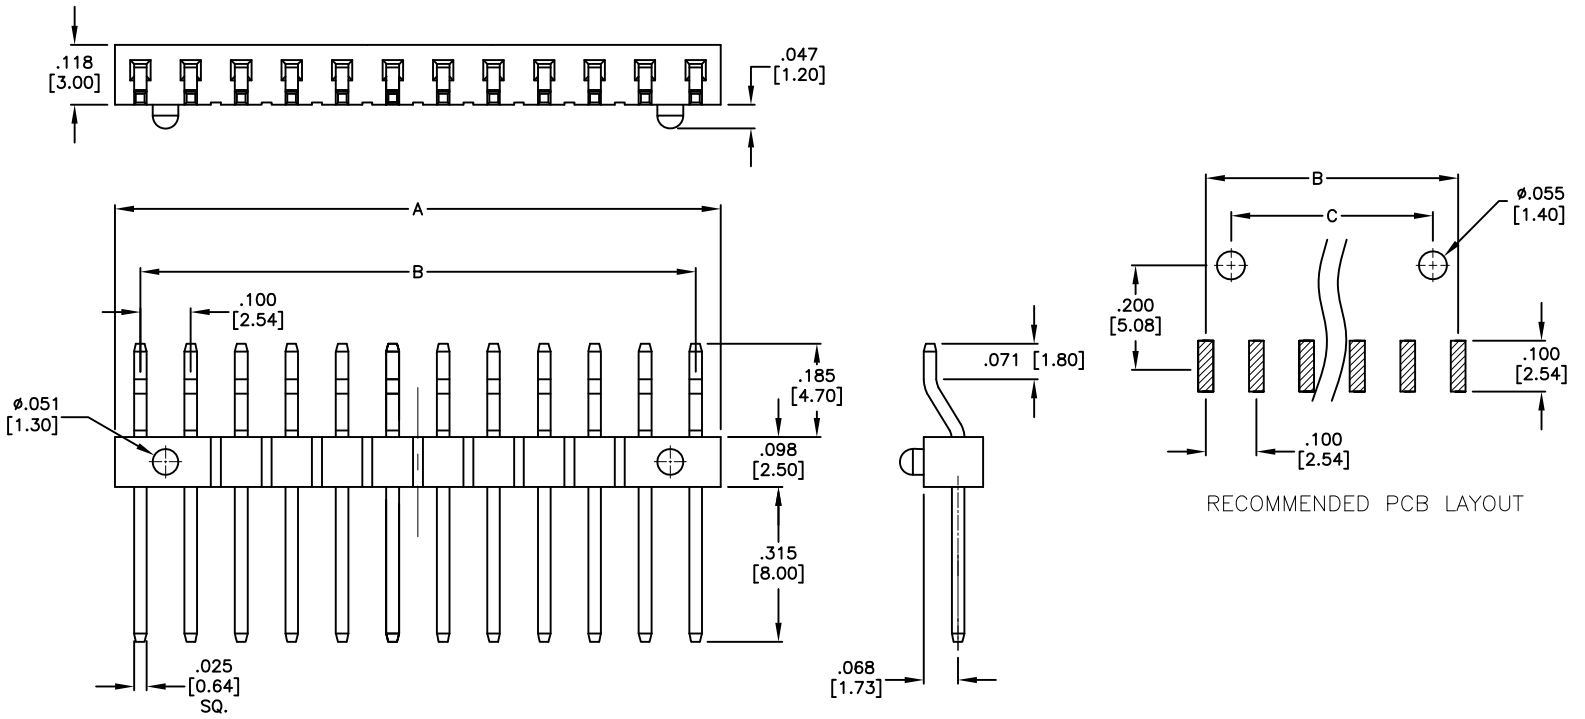

RECOMMENDED PCB LAYOUT

SPECIFICATIONS:
Material:
Insulator: Hi–temp thermoplastic, rated UL 94V–0
Insulator color: Black
Contacts: Brass
Plating:
Gold flash over Nickel underplate on contact area,
Tin over Nickel underplate on Solder tails
Electrical:
Current rating: 3 Amps max
Contact resistance: 20 mohms max
Insulation resistance: 1,000 Mohms min @ 500 VDC
Dielectric withstanding voltage: 600 VAC for 1 minute
Temperature Rating:
Operating temperature: –40°C to +105°C
Environmental:
Lead free, RoHS compliant

RoHS COMPLIANT

Positions: 3 thru 30
A = .100 [2.54] X No. of Positions
B = .100 [2.54] x No. of Spaces
C = .100 [2.54] x No. of (Spaces–1)

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE MM [INCHES]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	SS	1/28/13
CHECKED		
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: Single Row Right Angle, Low Profile, SMT with Locating Peg, 8mm Mating length

SIZE	PART NO.	REV.
X	PH1RB-XX-SGB-SMT-P	-

REF:	SCALE:	SHEET
S00032T	NTS	1 OF 1