

Rev	AWO #	Description	Date	Appr
-		RELEASED	10/11/13	


APPROVED: _____


DATE: _____ TITLE: _____

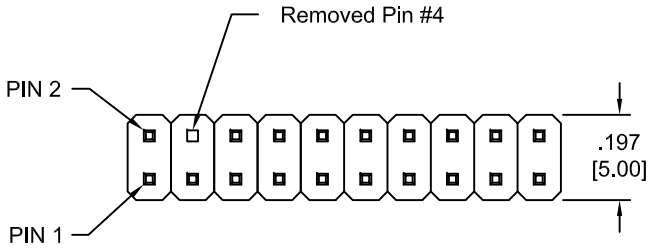

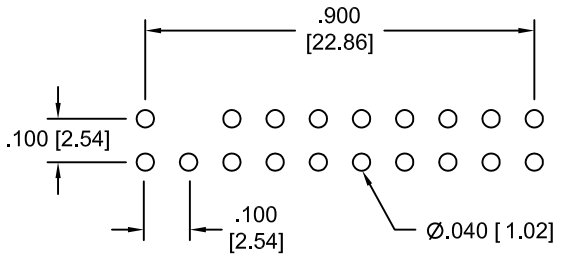

RECOMENDED
PCB LAYOUT

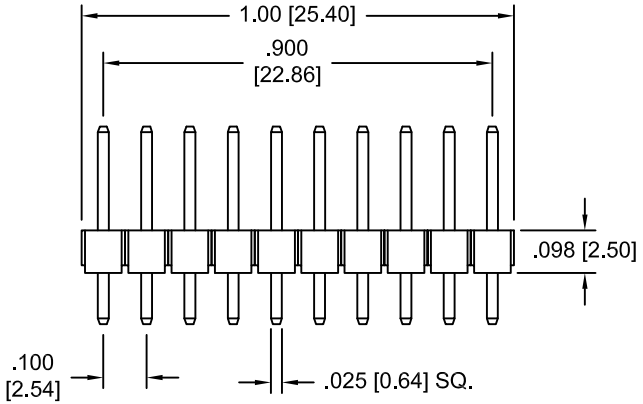



SPECIFICATIONS:
Material:
Insulator: Hi–temp thermoplastic, rated UL 94V–0
Insulator color: Black
Contacts: Brass
Plating:
15u" Gold over Nickel underplate on mating area,
Tin over Copper underplate on solder tails
Electrical:
Operating voltage: 250 VAC max
Current rating: 3 Amps max
Insulation resistance: 5000 Mohms min @ 500 VDC
Dielectric withstanding voltage: 500 VAC for 1 minute
Temperature Rating:
Operating temperature: –40°C to +105°C
Environmental:
Lead free, RoHS Compliant

RoHS COMPLIANT

NOTE: PIN #4 NOT LOADED DURING ASSMBLY

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	AY	10/11/13
CHECKED	EH	10/11/13
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: DUAL ROW PIN HEADER, .100" [2.54mm] PITCH, SEL GOLD PLATED, 20 PIN, PIN 4 REMOVED

SIZE	PART NO.	REV.
X	PH2-20-VA-X04-HT	-

REF: | SCALE: NTS | SHEET 1 OF 1