

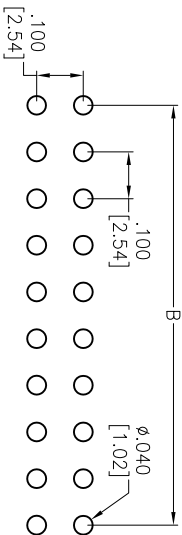
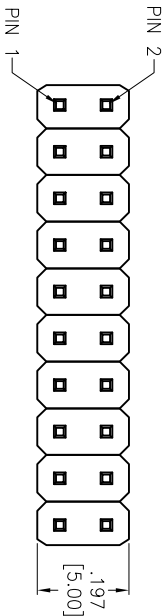


APPROVED: _____
DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	6/03/09	
A		REDRAWN	5/22/14	HR/JAC



RECOMMENDED PCB LAYOUT

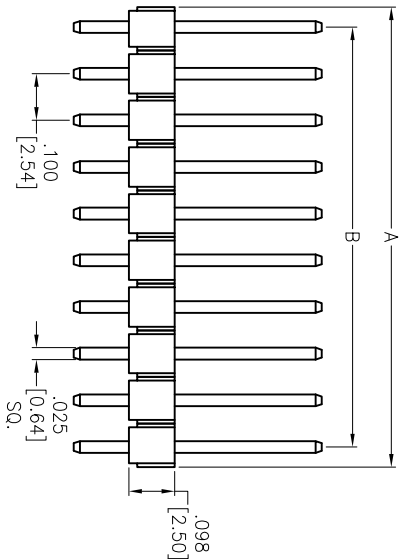

SPECIFICATIONS:

Material: Insulator: PBT, Glass reinforced, rated UL 94V-0
Insulator color: Black
Contacts: Brass
Plating: Tin over Copper underplate overall
Electrical: Current rating: 3 Amps max
Contact resistance: 20 mohms max @ DC 100 mA
Insulation resistance: 5,000 Mohms min @ DC 500 V
Dielectric withstanding voltage: 500 VAC for 1 minute
Temperature Rating: Operating temperature: -40°C to +105°C
Environmental: Lead free, RoHS compliant.



Positions: 04 thru 80
A= .100 [2.54] x No. of Positions per Row
B= .100 [2.54] x No. of Spoces

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES				HOLES			
.X	± .10	ØXX	± .10	.X	± .10	ØXX	± .10
.XX	± .020	ØXX	± .015	.XX	± .020	ØXX	± .015
.XXX	± .015	ØXXX	± .010	.XXX	± .015	ØXXX	± .010
APPROVALS				DATE			
DRAWN	DY	6/03/09		TIN PLATED			
CHECKED				TITLE			
APPROVED				.100 [2.54] DUAL ROW PIN HEADER			
SIZE				PART NO.			
X				PH2-XX-TB			
REF: S00097				SCALE: NTS			
				SHEET 1 OF 1			

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710