

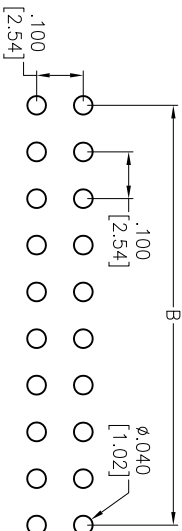
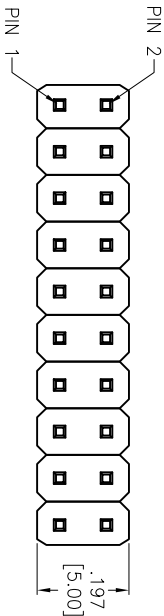


APPROVED: _____
DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	9/11/08	
A		REDRAWN	5/22/14	HR/JAC



RECOMMENDED PCB LAYOUT

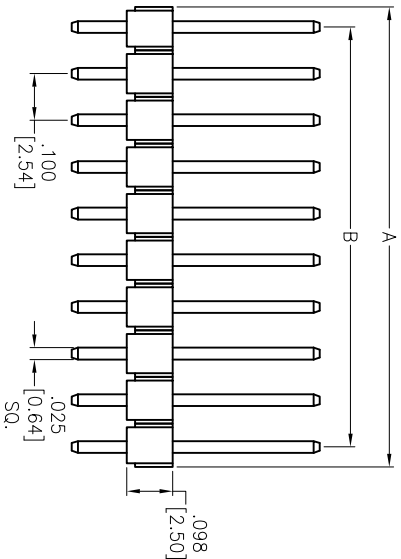

SPECIFICATIONS:

Material: Insulator: Hi-Temp Thermoplastic, rated UL 94V-0
Insulator color: Black
Contacts: Brass
Plating: Tin over Copper underplate overall
Electrical: Current rating: 3 Amps max
Contact resistance: 20 mohms max @ DC 100 mA
Insulation resistance: 5,000 Mohms min @ DC 500 V
Dielectric withstanding voltage: 500 VAC for 1 minute
Temperature Rating: Operating temperature: -40°C to +105°C
Environmental: Lead free, RoHS compliant.



Positions: .04 thru 80
A= .100 [2.54] x No. of Positions per Row
B= .100 [2.54] x No. of Spoces

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES				ADAM TECH 909 Rahway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710			
HOLES .X ± .10 ØX ± .10 .XX ± .020 ØXX ± .015 .XXX ± .015 ØXXX ± .010				TITLE .100 [2.54] DUAL ROW PIN HEADER TIN PLATED, HI-TEMP			
APPROVALS		DATE					
DRAWN	DY	9/11/08					
CHECKED							
APPROVED							
SIZE		PART NO.					
X				PH2-XX-TB-HT			
REF: S0009T		SCALE: NTS		SHEET 1 OF 1		REV. A	