
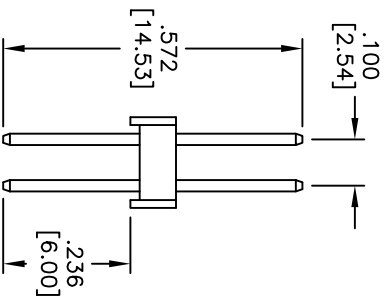
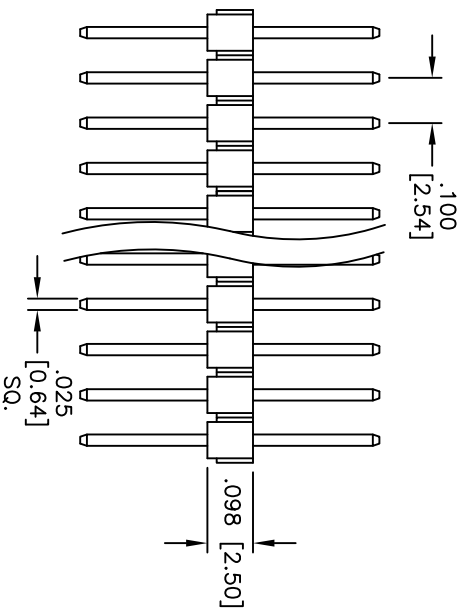
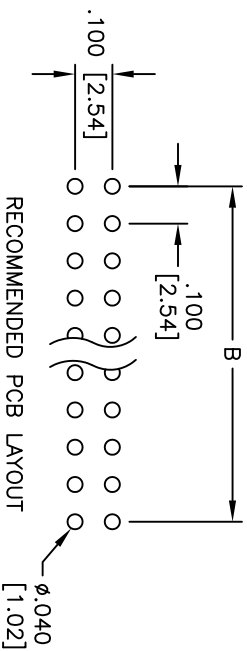


Rev	AWO #	Description	Date	Appr
-		RELEASED	6/27/13	

APPROVED: _____

DATE: _____ TITLE: _____

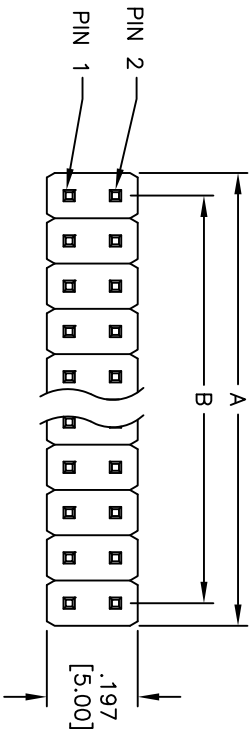

SPECIFICATIONS:

Material:

Insulator: PBT, glass reinforced, rated UL 94V-0

Insulator color: Black

Contacts: Brass

Plating:

Gold flash over Nickel underplate overall

Electrical:

Current rating: 3 Amps max

Contact resistance: 20 mohms max

Insulation resistance: 5,000 Mohms min @ 500 VDC

Dielectric withstanding voltage: 500 VAC for 1 minute

Temperature Rating:

Operating temperature: -40°C to +105°C

Environmental:

Lead free, RoHS compliant

Positions: 4 thru 80
A = .100 [2.54] x No. of Positions per Row
B = .100 [2.54] x No. of Spaces

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED
INCHES
.X ± .10 ØXX ± .10
.XX ± .020 ØXXX ± .015
.XXX ± .015 ØXXX ± .010
APPROVALS
DATE

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710
TITLE
.100 [2.54] DUAL ROW PIN HEADER
GOLD PLATED

DRAWN	AY	6/27/13	SIZE	PART NO.	REV.
CHECKED	LW	6/27/13	X	PH2-XX-U-.236/.572	-
APPROVED			REF: S00059T	SCALE: NTS	SHEET 1 OF 1

