

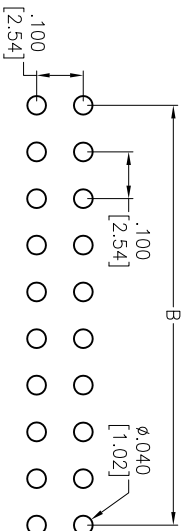
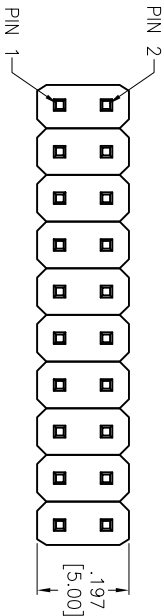


APPROVED: _____
DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	4/4/05	
A		REDRAWN	5/22/14	HR/JAC



RECOMMENDED PCB LAYOUT

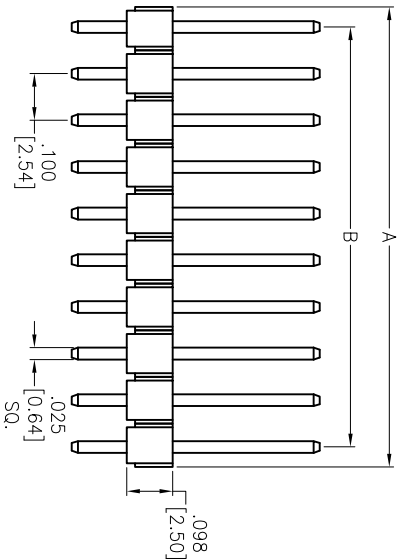

SPECIFICATIONS:

Material: Insulator: PBT, Glass reinforced, rated UL 94V-0
Insulator color: Black
Contacts: Brass
Plating: Gold flash over Nickel underplate overall
Electrical: Current rating: 3 Amps max
Contact resistance: 20 mohms max @ DC 100 mA
Insulation resistance: 5,000 Mohms min @ DC 500 V
Dielectric withstanding voltage: 500 VAC for 1 minute
Temperature Rating: Operating temperature: -40°C to +105°C
Environmental: Lead free, RoHS compliant.



Positions: .04 thru 80
A= .100 [2.54] x No. of Positions per Row
B= .100 [2.54] x No. of Spces

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES				ADAM TECH 909 Rahway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710			
HOLES							
.X	± .10	ØX	± .10				
.XX	± .020	ØXX	± .015				
.XXX	± .015	ØXXX	± .010				
APPROVALS			DATE			TITLE	
DRAWN	DY	4/4/05		.100 [2.54] DUAL ROW PIN HEADER			
CHECKED				GOLD PLATED			
APPROVED				SIZE PART NO. PH2-XX-UB			
REF: S00097		SCALE: NTS		SHEET 1 OF 1		REV. A	