
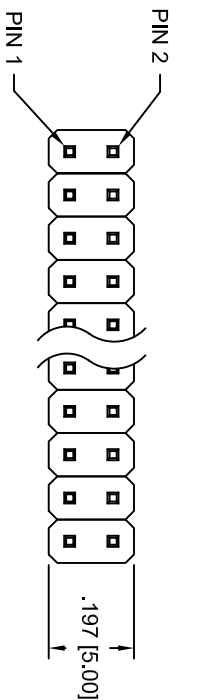




Rev	AWO #	Description	Date	Appr
-		RELEASED	9/20/04	

APPROVED: _____

DATE: _____ TITLE: _____

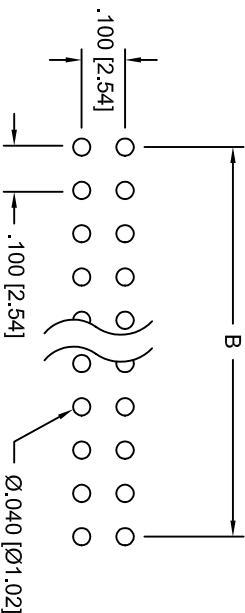

RECOMMENDED
PCB LAYOUT

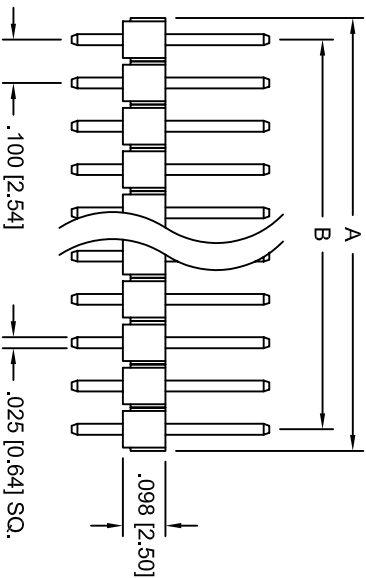

A = .100 [2.54] X No. of Positions.
B = .100 [2.54] X No. of Spaces.

SPECIFICATIONS:

Material: Insulator: PBT, rated UL 94V-0
Insulator color: Black
Contacts: Brass
Plating: 15u" Gold over Nickel underplate on mating area, Tin over Copper underplate on solder tails
Electrical: Operating voltage: 250 VAC max
Current rating: 3 Amps max
Insulation resistance: 5000 Mohms min @ 500 VDC
Dielectric withstanding voltage: 1000 VAC for 1 minute
Temperature Rating: Operating temperature: -55°C to +105°C

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

DUAL ROW PIN HEADER, .100" [2.54mm]
PITCH, SEL GOLD PLATED, 4 TO 80 PINS

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES HOLES .X ± .10 ØX ± .10 .XX ± .020 ØXX ± .015 .XXX ± .015 ØXXX ± .010				ADAM TECH 909 Rahway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710			
APPROVALS		DATE		TITLE			
DRAWN	SS	9/20/04		DUAL ROW PIN HEADER, .100" [2.54mm] PITCH, SEL GOLD PLATED, 4 TO 80 PINS			
CHECKED				SIZE PART NO.			
APPROVED				REF: X PH2-XX-VA			
				SCALE: NTS SHEET 1 OF 1 REV: -			