

6

5

4

3



2

1



Rev	AWO #	Description	Date	Appr
-		RELEASED	2/1/12	

APPROVED: _____

DATE: _____ TITLE: _____

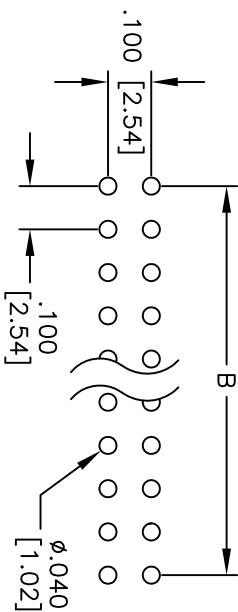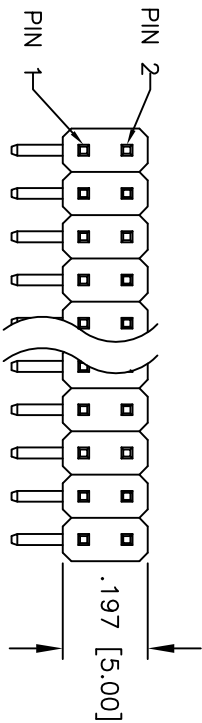

RECOMMENDED PCB LAYOUT

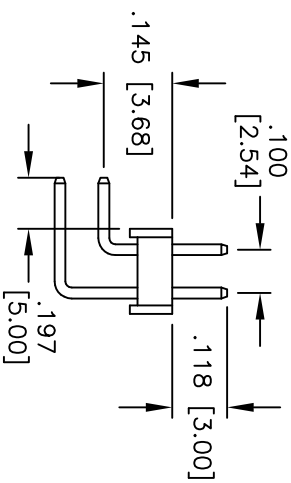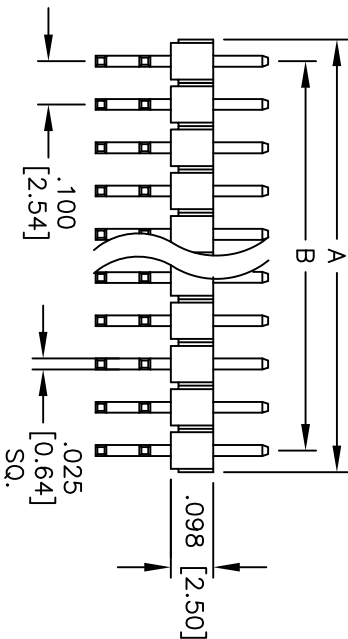

SPECIFICATIONS:

Material:

Insulator: PBT, glass fiber, rated UL 94V-0

Insulator color: Black

Contacts: Brass

Plating:

Gold flash over Nickel underplate overall

Electrical:

Current rating: 3 Amps max

Contact resistance: 20 mohms max. Initial

Insulation resistance: 5000 Mohms min @ 500V

Dielectric voltage: 500 VAC for 1 minute

Temperature Rating:

Operating temperature: -55°C to +105°C

Environmental:

Lead free, RoHS compliant.

Recommended soldering temp: 235°C for 5 sec.



Positions: 04 thru 80
A = .100 [2.54] X No. of Positions.
B = .100 [2.54] X No. of Spaces.

ADAM TECH

909 Railway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

.100 [2.54] DUAL ROW PIN HEADER, GOLD PLATED

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED				INCHES				HOLDS			
.X	± .10	ØXX	± .10	.XX	± .020	ØXXX	± .015	.XXX	± .015	ØXXX	± .010
APPROVALS				DATE							
DRAWN	AY			2/1/12							
CHECKED	WC			2/1/12							
APPROVED											
SIZE				PART NO.				REV.			
X				PH2RA-XX-U-.118/.197/.145				-			
REF: S00039T				SCALE: NTS				SHEET 1 OF 1			