

Rev	AWO #	Description	Date	Appr
-		RELEASED	3/13/19	


APPROVED: _____


DATE: _____ TITLE: _____

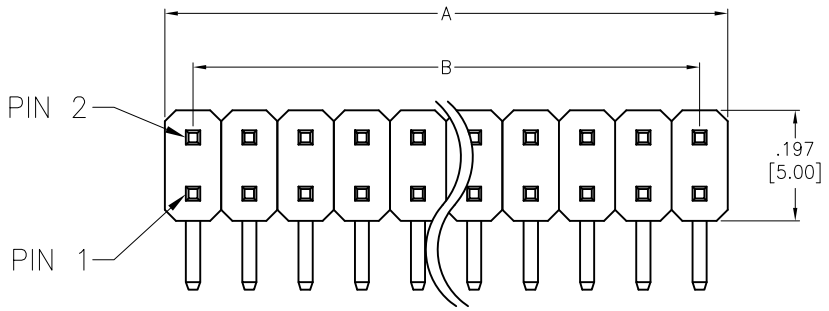

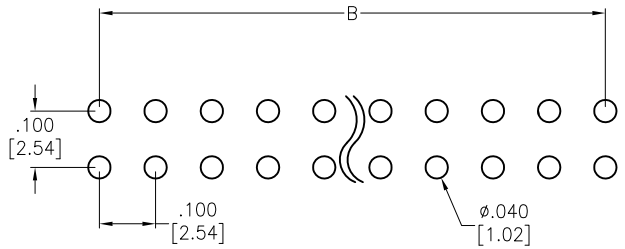

RECOMMENDED PCB LAYOUT

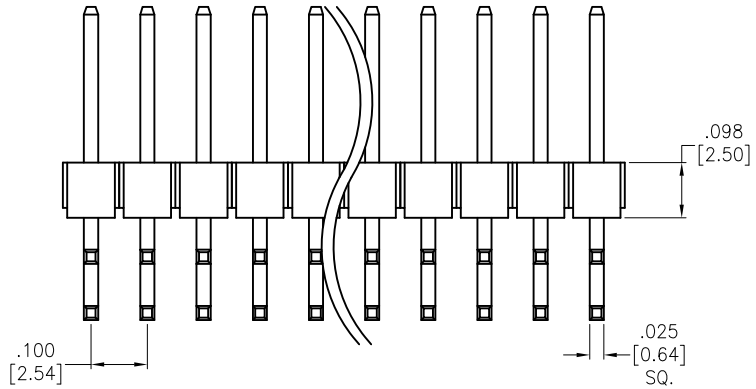

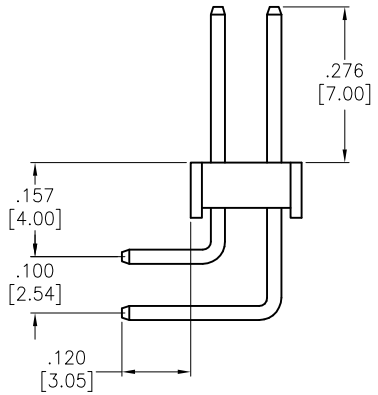

SPECIFICATIONS:
Material:
Insulator: Hi–Temp Thermoplastic, rated UL 94V–0
Insulator color: Black
Contacts: Brass
Plating:
15u" Gold over Nickel underplate on contact area, Tin over Copper underplate on tails.
Electrical:
Current rating: 3 Amp
Contact resistance: 20 mohms max.
Insulation resistance: 5000 Mohms min @ 500 VDC
Temperature Rating:
Operating temperature: –40°C to +105°C
Environmental:
Lead free, RoHS compliant.

RoHS COMPLIANT

Positions: 04 thru 80
A = .100 [2.54] X No. of Positions.
B = .100 [2.54] X No. of Spaces.

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	AY	3/13/19
CHECKED	YC	3/13/19
APPROVED		

ADAM TECH INTERCONNECTS
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE
.100 [2.54] DUAL ROW PIN HEADER
15u" SEL-GOLD PLATED

SIZE	PART NO.	REV.
X	PH2RA-XX-V-.276/.120/.157	-

REF:	SCALE:	SHEET
S00059T	NTS	1 OF 1