

APPROVED: _____

DATE: _____ TITLE: _____


Rev	AWO #	Description	Date	Appr
-		RELEASED	1/25/11	
A		UPDATED DRAWING	1/31/18	HR/MY
B		UPDATED DRAWING-NEW	4/7/20	AY/MY

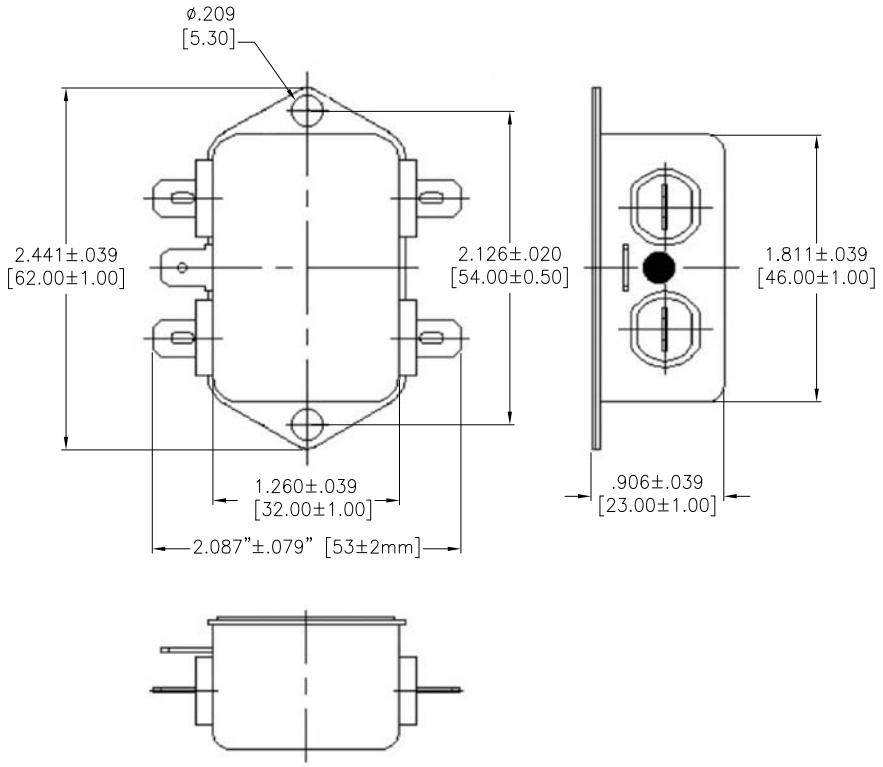

CIRCUIT DIAGRAM

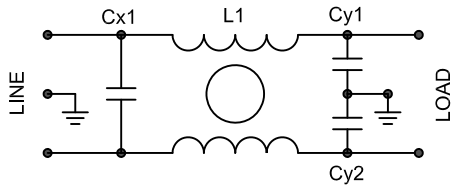

Insertion Loss in dB: (Measured in 50Ω system, as IEC/CISPR NO.17)

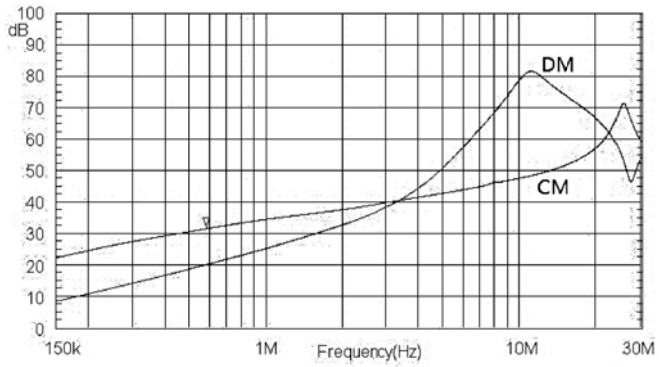

SPECIFICATIONS:
Material:
Insulator: Thermoplastic, rated UL 94V–0
Insulator color: Black
Contacts: Copper Alloy
Plating:
Nickel over Copper underplate overall
Electrical:
Rated voltage: 120/250 VAC
Operating frequency: 50/60 Hz
Rated Current: 10 A
Climatic: Category: HPF (25/085/21)
Test Voltage: (60 secs)
line to ground: 1500 VAC
line to line: 1500 VDC
Environmental:
Lead free, RoHS compliant

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	AY	1/25/11
CHECKED	VW	1/25/11
APPROVED		

ADAM TECH INTERCONNECTS
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE
EMI/RFI POWER LINE FILTER
SMALL OUTLINE CHASSIS MOUNT

SIZE	PART NO.	REV.
X	PLF-10D32-CN	B

REF: S00004C | SCALE: NTS | SHEET 1 OF 1