


APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	6/16/05	
A		UPDATED	2/7/16	

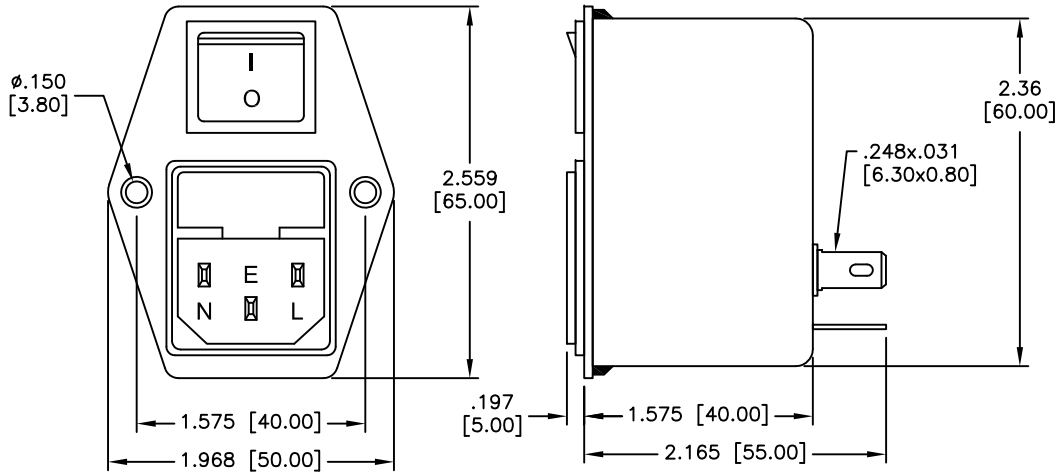


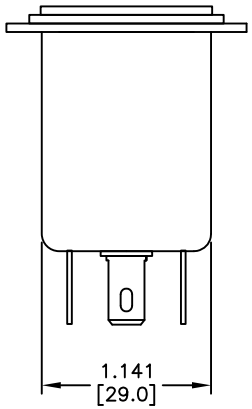

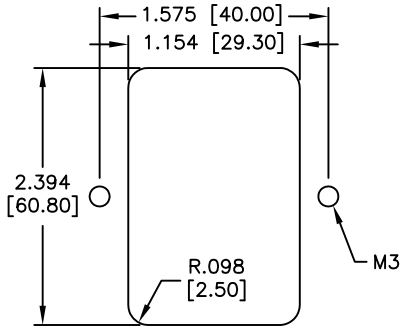


RECOMENDED
PANEL CUT-OUT

CIRCUIT DIAGRAM

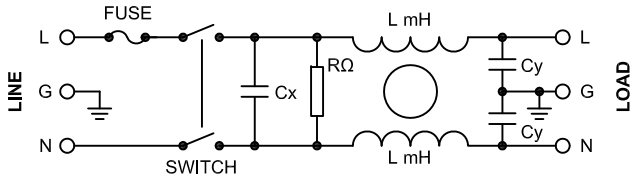

Insertion Loss In dB (Measured In 50Ω systems, as IEC / clspr No. 17)

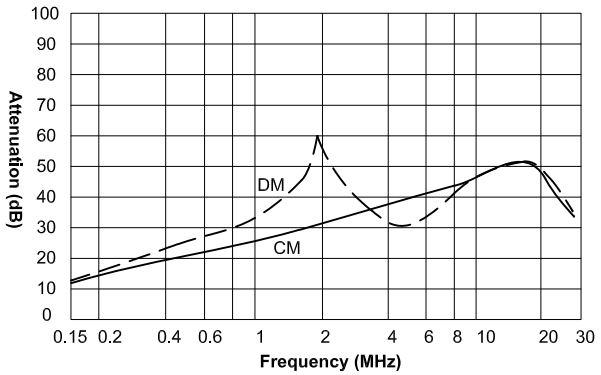

SPECIFICATIONS:
Material:
Insulator: Nylon 66, glass reinforced, rated UL 94V-0
Insulator color: Black
Contacts: Phosphor Bronze
Casing: Copper Alloy, Nickel plated
Plating:
Nickel over Copper underplate overall
Electrical:
Operating voltage: 120/250 VAC
Current rating: 10 Amps max
Insulation resistance: 3,000 Mohms min
Dielectric withstanding voltage: 2,000 VAC for 1 minute
Ground capacitance: 2.2 nF
Leakage current: 0.5 mA max
Temperature Rating:
Operating temperature: -25°C to +70°C
Environmental:
Lead free, RoHS compliant RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	SS	6/16/05
CHECKED		
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: EMI/RFI POWER FILTER, FLANGED MODULE W/ FUSE HOLDER AND SWITCH

SIZE	PART NO.	REV.
X	PLF-10DZ2KR	A

REF: | SCALE: NTS | SHEET 1 OF 1