

Rev	AWO #	Description	Date	Appr
-		RELEASED	6/16/05	


APPROVED: _____

DATE: _____ TITLE: _____

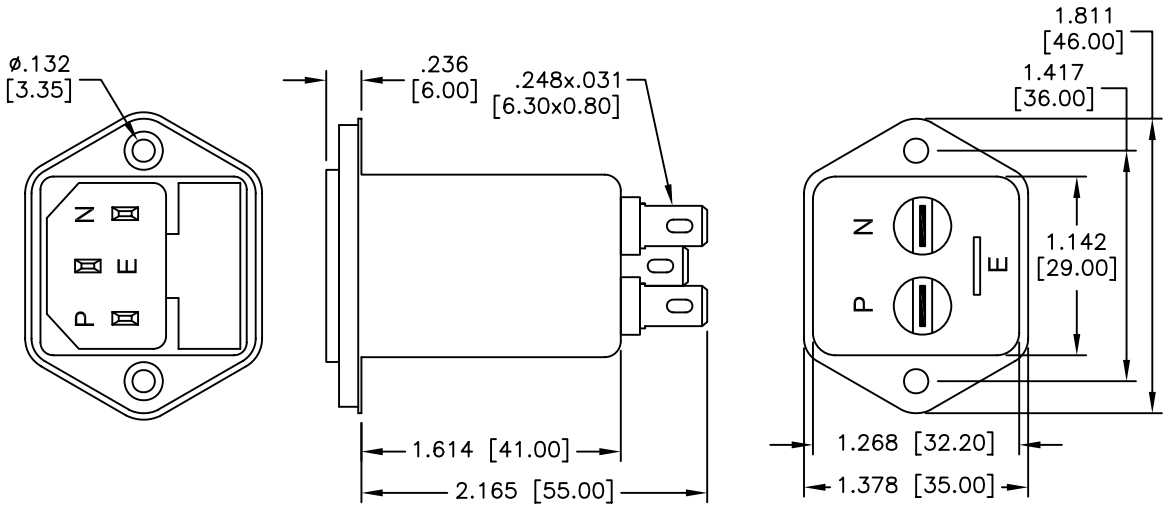


CIRCUIT DIAGRAM

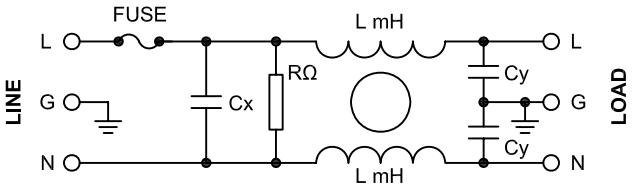

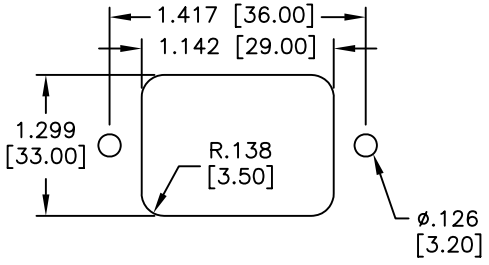

RECOMENDED
PANEL CUT–OUT

Insertion Loss in dB (Measured in 50Ω systems, as IEC / cispr No. 17)

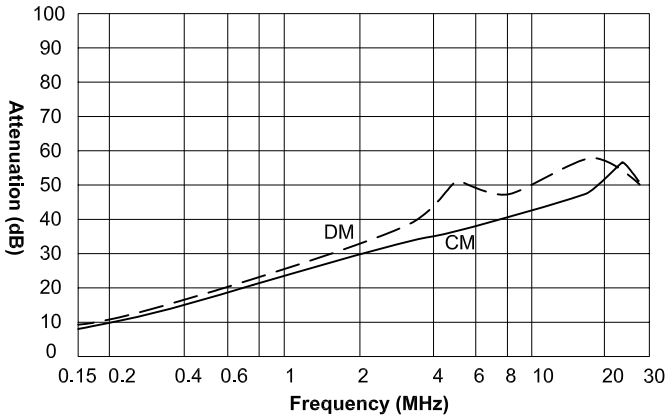

SPECIFICATIONS:

Material:

Insulator: Nylon 66, glass reinforced, rated UL 94V–0

Insulator color: Black

Contacts: Phosphor Bronze

Casing: Copper Alloy, Nickel plated

Plating:

Nickel over Copper underplate overall

Electrical:

Operating voltage: 120/250 VAC

Current rating: 10 Amps max

Insulation resistance: 3,000 Mohms min

Dielectric withstanding voltage: 2,000 VAC for 1 minute

Ground capacitance: 2.2 nF

Leakage current: 0.5 mA max

Temperature Rating:

Operating temperature: –25°C to +70°C

Environmental:

Lead free, RoHS compliant

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	SS	6/16/05
CHECKED		
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: EMI/RFI POWER FILTER, FUSED
INLET SOCKET W/FLANGE MOUNTING

SIZE	PART NO.	REV.
X	PLF-10DZ2R	-

REF: | SCALE: NTS | SHEET 1 OF 1