

APPROVED: _____


DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	6/16/05	
A		REVISED DIM. & SPEC.	7/29/13	

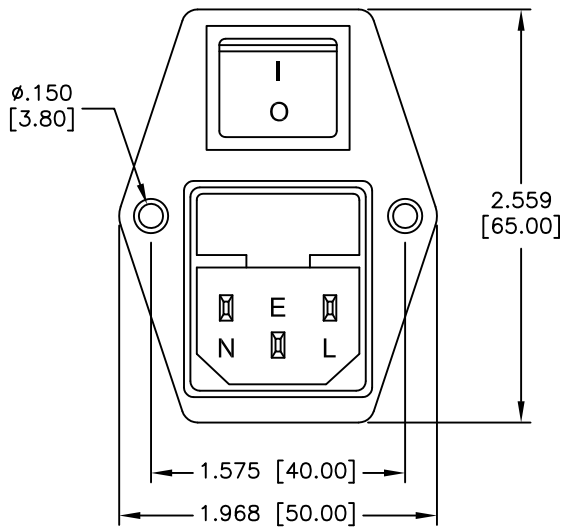


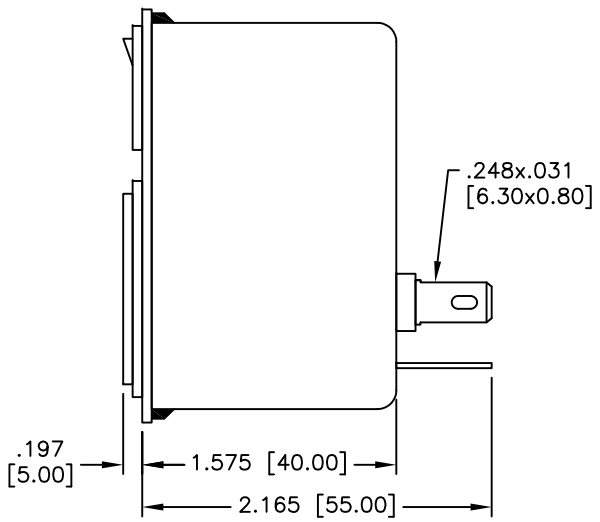

CIRCUIT DIAGRAM

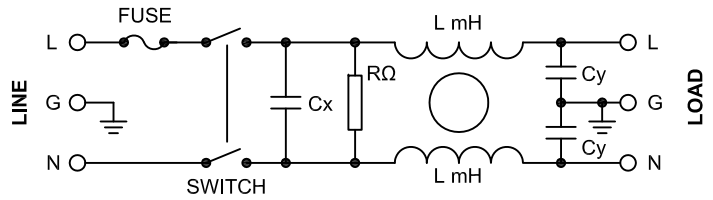


L	Cx	Cy	R
2x2.4mH	0.22uF	2x2200pF	1MΩ

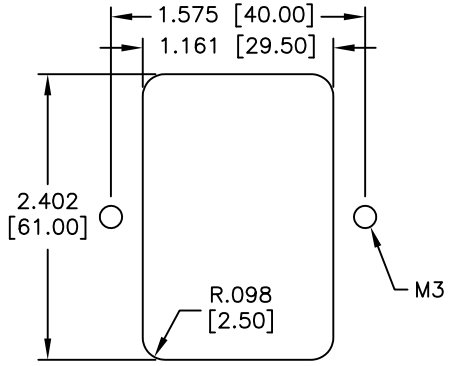

RECOMENDED
PANEL CUT-OUT

Insertion Loss in dB (Measured in 50Ω systems, as IEC / cispr No. 17)

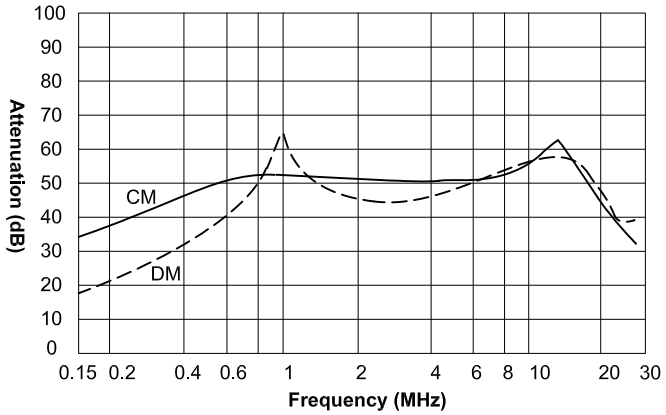

SPECIFICATIONS:
Material:
Insulator: Thermoplastic, rated UL 94V-0
Insulator color: Black
Contacts: Copper Alloy
Casing: Copper Alloy, Nickel plated
Plating:
Nickel over Copper underplate overall
Electrical:
Voltage rating: 250 VAC
Current rating: 1 Amp
Insulation resistance: 3,000 MΩ min
Dielectric withstanding voltage: 1,500 VAC for 1 minute
Leakage current: (250V/50Hz) 0.23 mA max
Climatic Category: HPF (25/085/21)
Environmental:
Lead free, RoHS compliant

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	SS	6/16/05
CHECKED		
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: EMI/RFI POWER FILTER
FLANGED MODULE W/FUSE AND SWITCH

SIZE	PART NO.	REV.
X	PLF-1DZ2KR	A

REF: S00004C | SCALE: NTS | SHEET 1 OF 1