

APPROVED: _____

DATE: _____ TITLE: _____


Rev	AWO #	Description	Date	Appr
-		RELEASED	06/28/12	
A		UPDATE DRAWING	5/8/20	AY/NL

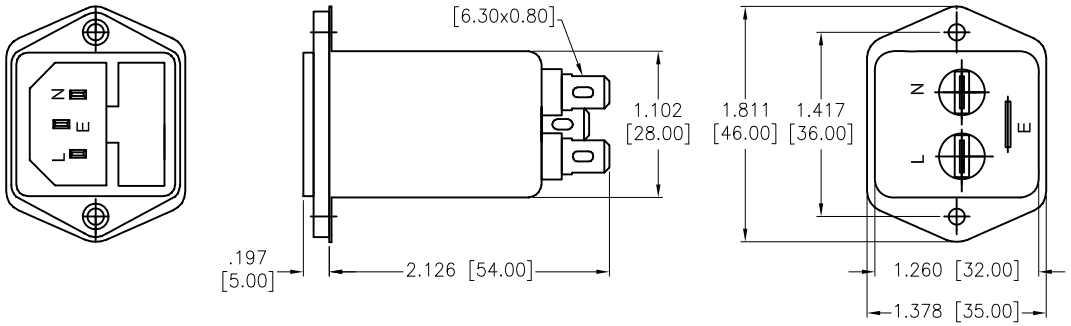


CIRCUIT DIAGRAM

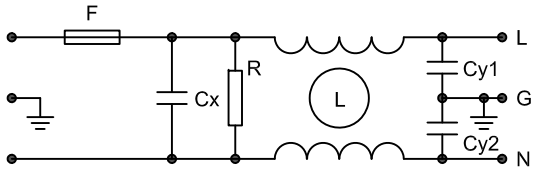

L	Cx	Cy1/Cy2	R
2x2.7mH	0.1uF	2200pF/2200pF	1MΩ

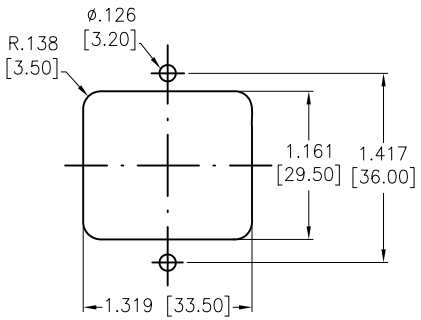

RECOMMENDED PANEL CUT

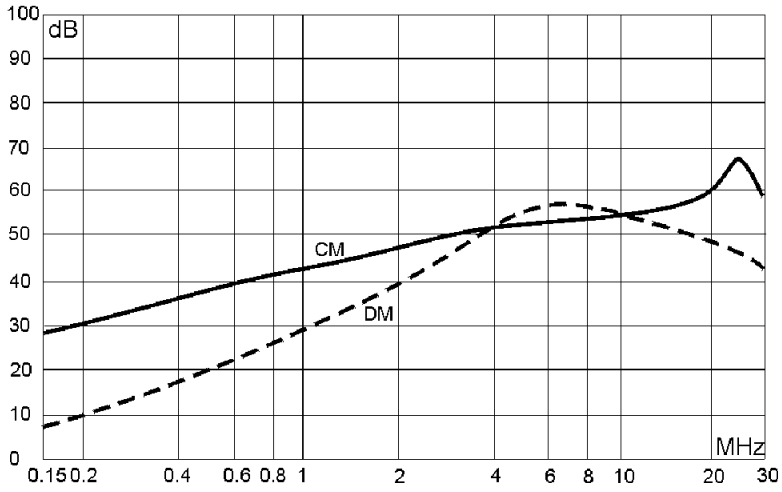

SPECIFICATIONS:

Electrical:

Voltage rating: 125/250 VAC

Current rating: 3 A

Climatic Category: HPF(25/085/21)

Leakage current(250V/50Hz) ≦ 0.3mA

Operating Frequency: 50/60 Hz

Test Voltage (1min): 1500 VAC (Line to Ground)
1500 VDC (Line to Line)

Insulation Resistance : line to ground : ≧ 3000MΩ

Environmental:

Lead free, RoHS compliant

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	TW	06/28/12
CHECKED	AY	06/28/12
APPROVED		

ADAM TECH INTERCONNECTS
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE: EMI/RFI POWER FILTER, FUSED
INLET SOCKET W/FLANGE MOUNTING

SIZE	PART NO.	REV.
X	PLF-3DZ2R	A

REF: S00004C | SCALE: NTS | SHEET 1 OF 1