

APPROVED: _____


DATE: _____ TITLE: _____


Rev	AWO #	Description	Date	Appr
-		RELEASED	6/15/05	
A		UPDATE DRAWING	4/29/24	LH/LL1




CIRCUIT DIAGRAM

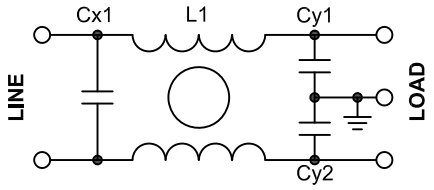

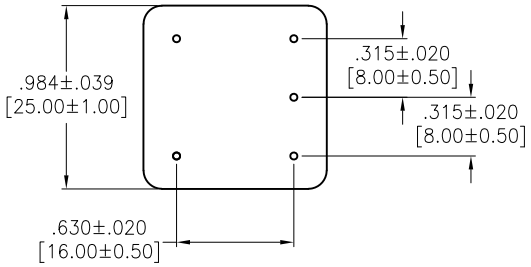



Insertion Loss in dB (Measured in 50Ω systems, as IEC / cispr No. 17)

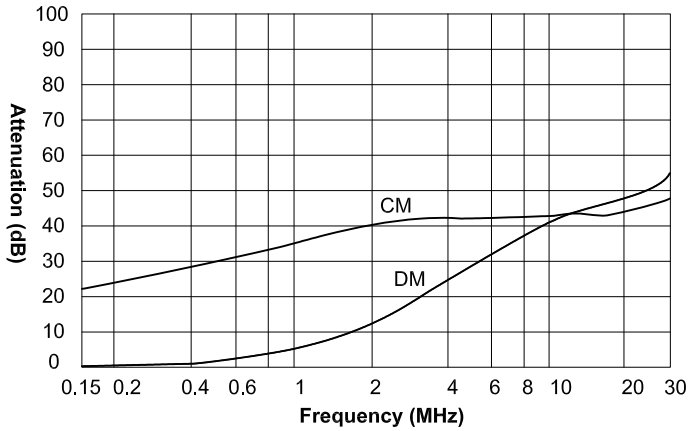

SPECIFICATIONS:

Material:

Insulator: Polycarbonate, glass reinforced, rated UL 94V–0

Insulator color: Black

Contacts: Phosphor Bronze

Casing: Copper Alloy, Nickel plated

Plating:

Tin over over underplate overall

Electrical:

Voltage rating: 120/250V AC

Test Voltage: (1 min)

Line to Ground: 1500V AC

Line to Line: 1500V DC

Current rating: 3 Amp

Insulation resistance: 3,000 Mohms min

Leakage Current (250V AC/50Hz): <0.5mA

Environmental:

Lead free, RoHS compliant RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]. TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

DRAWN	SS	6/15/05
CHECKED		
APPROVED		

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN PERMISSION FROM ADAM TECH

ADAM TECH
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE: EMI/RFI POWER FILTER
METAL CASE, PCB MOUNT

SIZE	PART NO.	REV.
X	PLF-3PC	A

REF: S00004C | SCALE: NTS | SHEET 1 OF 1