

APPROVED: _____


DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	6/16/05	
A		REDRAWN	06/28/12	

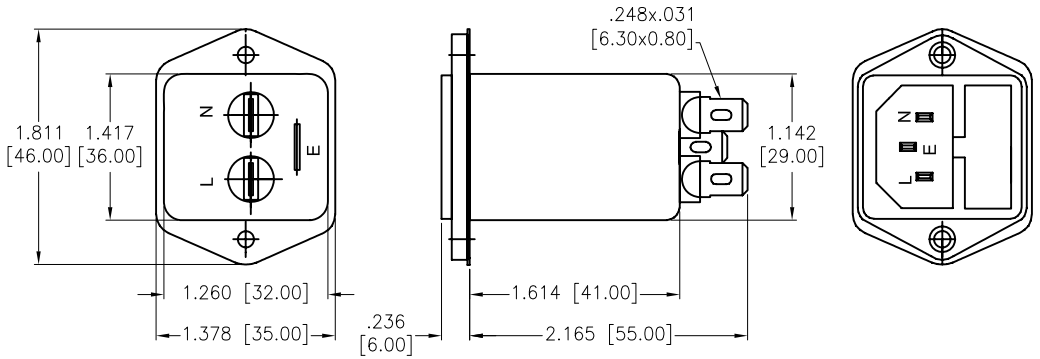


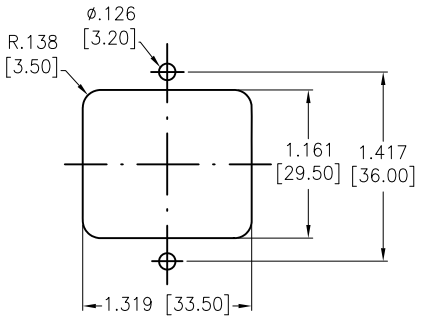

CIRCUIT DIAGRAM

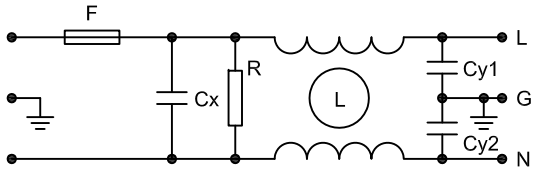

L	Cx	Cy1/Cy2	R
2x1.0mH	0.1uF	2200pF/2200pF	1MΩ

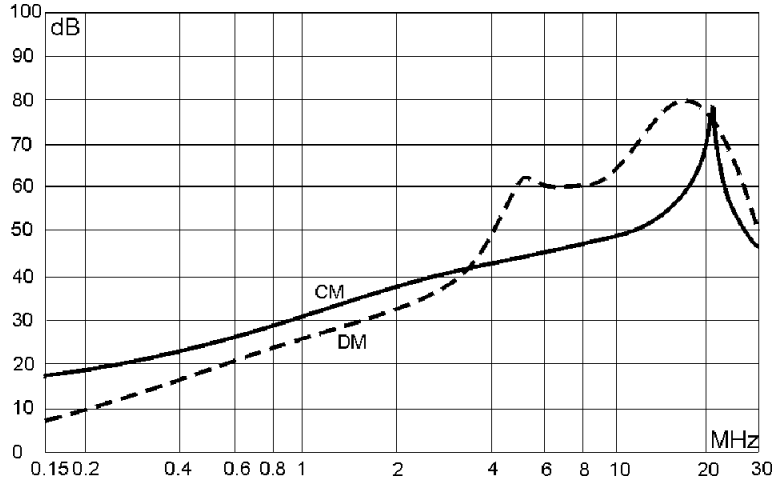

SPECIFICATIONS:

Material:

Insulator: PA66, rated UL 94V-0

Insulator color: Black

Contacts: Copper Alloy

Plating:

Nickel over Copper underplate overall

Electrical:

Operating voltage: 125/250 VAC

Current rating: 6 Amp max

Insulation resistance: 3,000 Mohms min

Dielectric withstanding voltage: 1,500 VAC for 1 minute

Leakage current: 0.3 mA max

Temperature Rating:

Operating temperature: -25°C to +85°C

Environmental:

Lead free, RoHS compliant

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	SS	6/16/05
CHECKED		
APPROVED		

ADAM TECH

909 Rahway Avenue, Union, NJ 07083

Phone: 908-687-5000 Fax: 908-687-5710

TITLE: EMI/RFI POWER FILTER, FUSED
INLET SOCKET W/FLANGE MOUNTING

SIZE	PART NO.	REV.
X	PLF-6DZ2R	A

REF: S00004C | SCALE: NTS | SHEET 1 OF 1