

APPROVED: _____

DATE: _____ TITLE: _____


Rev	AWO #	Description	Date	Appr
-		RELEASED	6/15/05	
A		UPDATED DRAWING	10/8/15	HR/LL

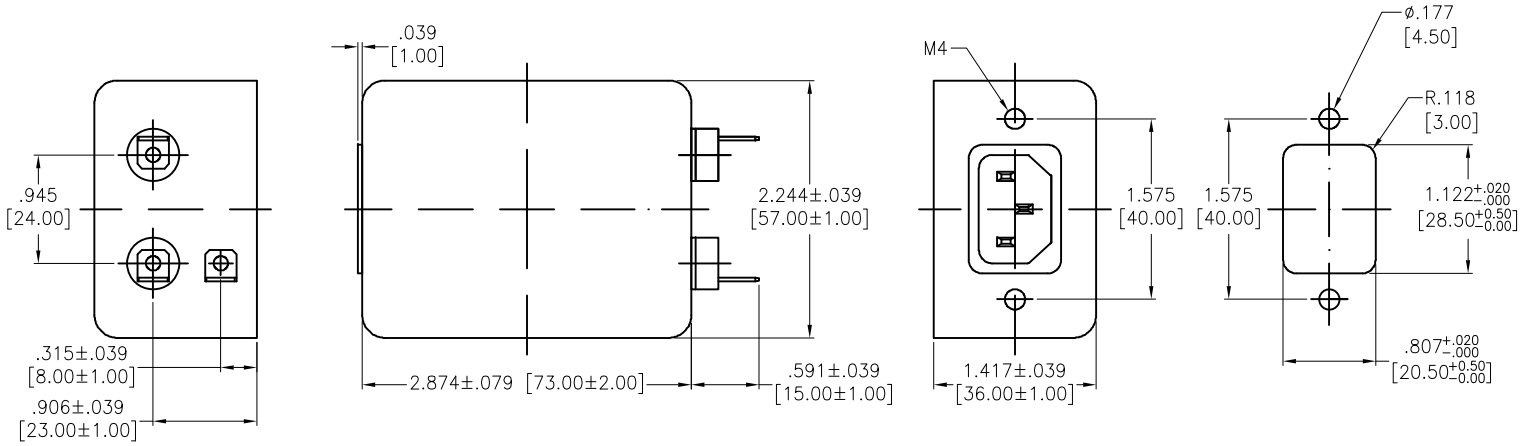

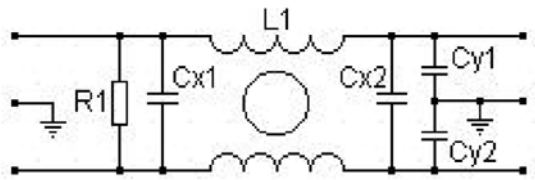

L1±50/30%	Cx1,Cx2	Cy1 ,Cy2	R1
2× 3.3mH	0.47 uF	4700 pF	1.5M Ω

Insertion Loss in dB: (Measured in 50 Ω system ,as IEC/CISPR NO.17）

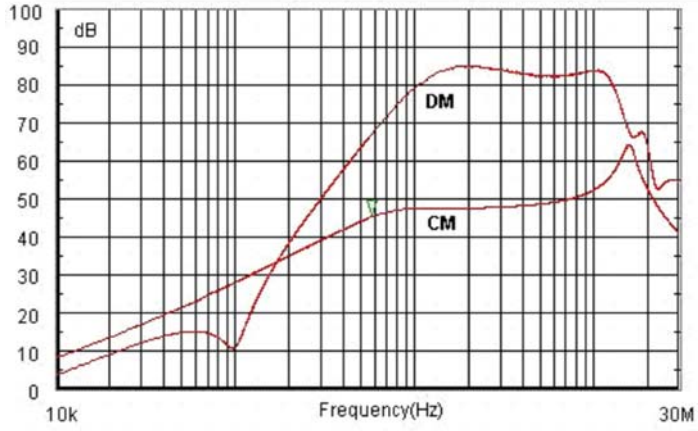

SPECIFICATIONS:
Electrical:
Operating voltage: 120/250 VAC
Current rating: 6 A
Operating Frequency: 50/60 Hz
Test Voltage (1min): 1500 VAC / 2250 VDC (Line to Ground)
1500 VDC (Line to Line)
Insulation resistance: 3,000 Mohms min
Leakage current (250VAC/50Hz): 0.8 mA max
Environmental:
Lead free, RoHS compliant

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	SS	6/15/05
CHECKED		
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: EMI/RFI POWER FILTER
SCREW IN CHASSIS MOUNT

SIZE	PART NO.	REV.
X	PLF-6DZB21	A

REF: S00004C | SCALE: NTS | SHEET 1 OF 1