


APPROVED: _____


DATE: _____ TITLE: _____


Rev	AWO #	Description	Date	Appr
-		Released	12/22/03	
A		REDRAWN	1/25/13	

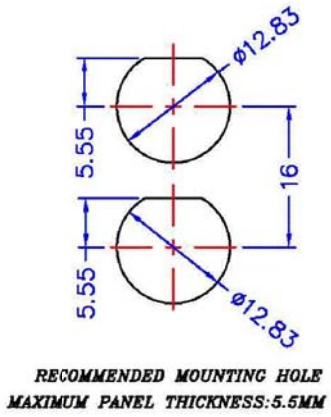

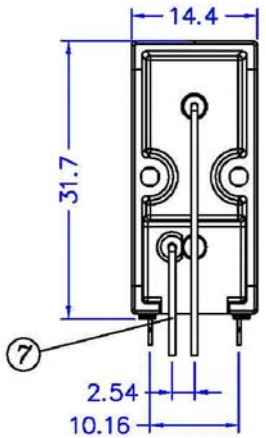

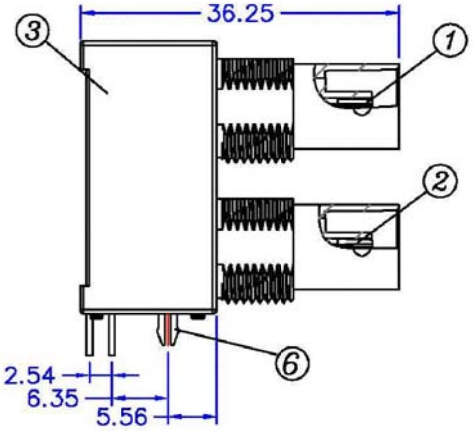

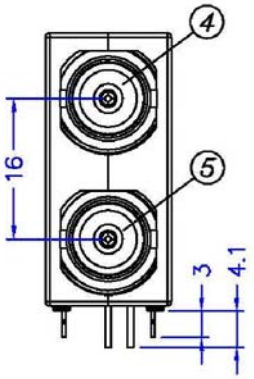



SPECIFICATIONS

Material:

1. Center Contact: Phosphor Bronze, Gold and Tin plated.
2. Center Contact: Phosphor Bronze, Gold plated.
3. Body: Zinc Alloy, Nickel Plated

4&5. Insulator: PE–606.

6. Mounting Post: Bronze,, Nickel Plated
7. Solder Tail: Copper Wire, Tin plated.

Electrical:

Nominal Impedance: 75 ohms

Frequency range: 0–1 GHz

Contact Resistance: 3 Milliohms max. (Center Contact)
2 Milliohms max. (Outer Contact)

Insulator Resistance: 5000 Megohms min.

Environmental:

Lead free, RoHS compliant.

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE MM [INCHES]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	SLS	12/22/03
CHECKED		
APPROVED		

ADAM TECH

909 Rahway Avenue, Union, NJ 07083

Phone: 908–687–5000 Fax: 908–687–5710

TITLE: DUAL PORT BNC, R/A PCB MOUNT, 75 OHM IMPEDANCE

SIZE	PART NO.	REV.
X	RF1-01D-P-00-75-M	A

REF: S00049T | SCALE: NTS | SHEET 1 OF 1