

Rev	AWO #	Description	Date	Appr
-		RELEASED	10/5/19	

APPROVED: _____


DATE: _____ TITLE: _____

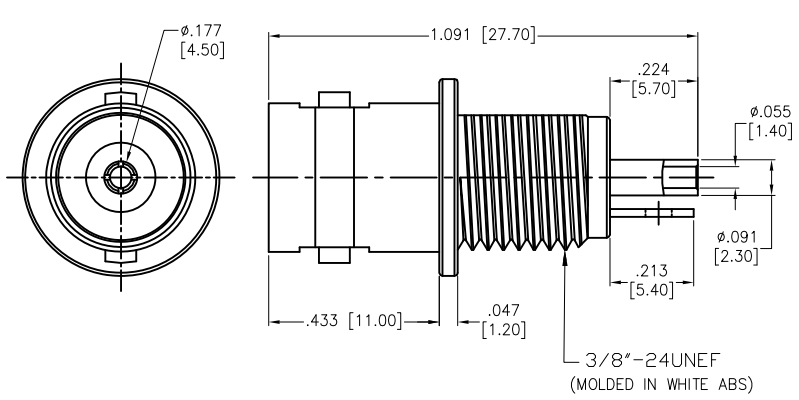


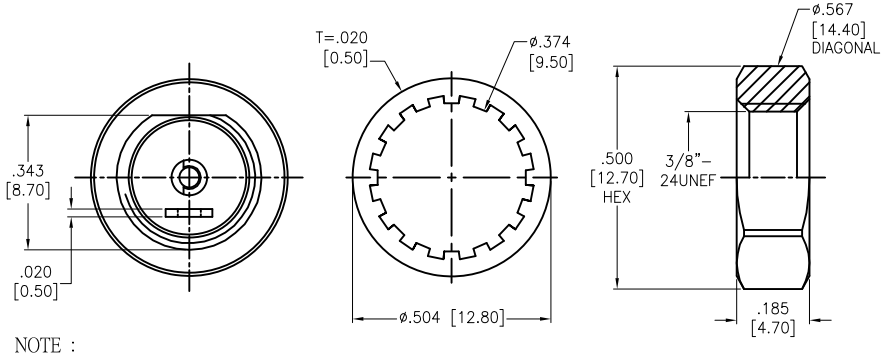

NOTE :

RECOMMENDED TORQUE : A MAXIMUM TORQUE OF 12 INCH-LBS MAY BE APPLIED ON HEX NUT WHEN MOUNTING CONNECTOR IN PANEL .

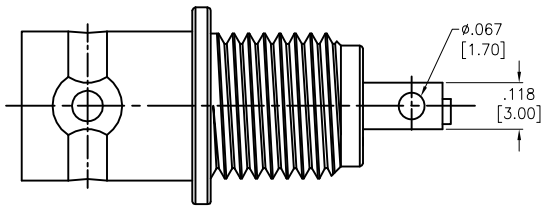



RECOMMENDED PANEL CUT

NUT	BRASS	NICKEL
WASHER	STEEL	NICKEL
INSULATOR	ABS	
INSULATED THREAD	ABS	
SOLDER LUG	BRASS	NICKEL
CENTER PIN	BRASS	GOLD
BODY	BRASS	NICKEL
PART NAME	MATERIAL	PLATING

SPECIFICATIONS:

Electrical:

Nominal Impedance: 50 ohms

Frequency range: 0~1 GHz

Environmental:

Lead free, RoHS compliant.

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	OW	10/5/19
CHECKED	EY	10/5/19
APPROVED		

ADAM TECH INTERCONNECTS
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE: BNC CONNECTOR, FRONT MOUNT JACK, 50 OHM, POM, W / NUT, WASHER

SIZE	PART NO.	REV.
X	RF1-110-A-17-50-HDW	-

REF:	SCALE:	SHEET
S00291T	NTS	1 OF 1