

Rev	AWO #	Description	Date	Appr
-		RELEASED	11/8/22	


APPROVED: _____

DATE: _____ TITLE: _____

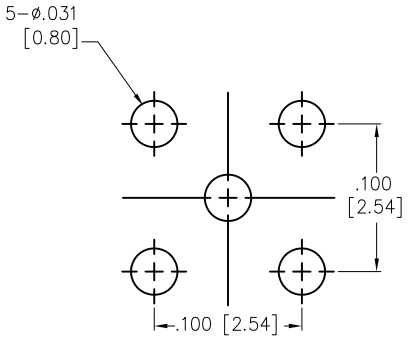

RECOMMENDED PCB LAYOUT

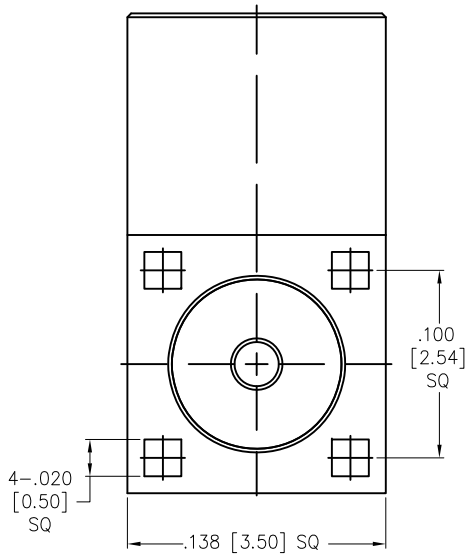

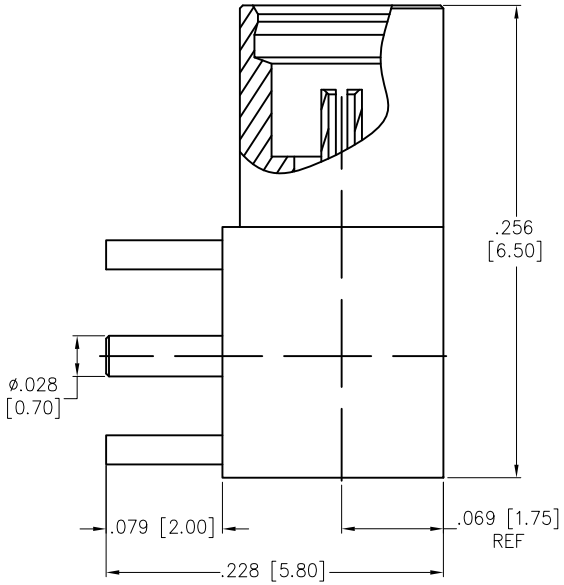

Body	Brass	Gold
Insulator	PTFE	–
Contact Pin	BeCu	Gold(3u")
Insulator	PTFE	–
DESCRIPTION	MATERIAL	FINISH

SPECIFICATIONS:

Electrical:
Nominal Impedance: 50 Ohms
Frequency range: DC–6 GHz
Working Voltage: 170 Volts max
Proof Voltage: 500 Volts
Insulation resistance: 1000 M–Ohm
Temperature Rating:
Operating temperature: –55°C to +155°C
Environmental:
Lead free, RoHS compliant. RoHS COMPLIANT

PACKAGED ON TAPE & REEL

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]. TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

DRAWN	JJ	11/8/22
CHECKED	YC	11/8/22
APPROVED		

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN PERMISSION FROM ADAM TECH

ADAM TECH
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE: RF CONNECTOR, TYPE MMCX R/A. JACK 50 OHM

SIZE	PART NO.	REV.
X	RF12-17D-T-00-50-G-T/R	-

REF:	SCALE:	SHEET
S00277T	NTS	1 OF 1