
APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	8/6/15	
A		UPDATED PACKING DRAWING	10/5/15	HR/OC
B		UPDATED PACKING	5/25/16	AY/OC

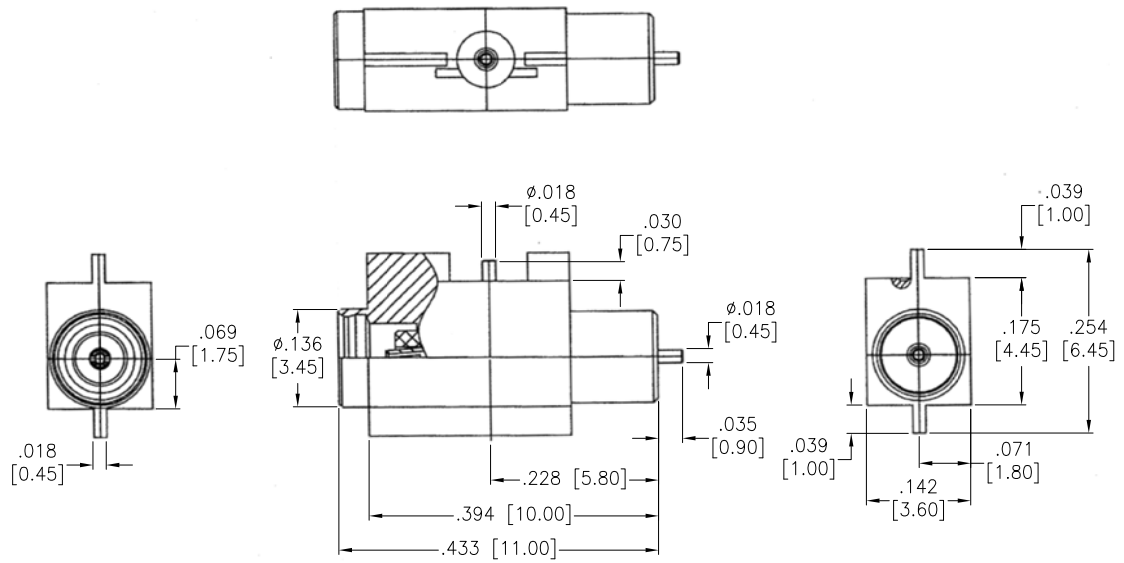

ITEM NAME	MATERIAL	FINISH
SPRING	SPRING STEEL	
FEMALE CONTACT	BERYLLIUM COPPER	
SLEEVE	BRASS	GOLD
CONTACT	BRASS	GOLD
INSULATOR	TFFLON	WHITE
BODY	BRASS	GOLD

SPECIFICATIONS:
Electrical:
Nominal Impedance: 50 ohms
Frequency range: 1–6 GHz
Voltage Rating: 1–125V
Temperature Rating:
Operating temperature: –55°C to +155°C
Environmental:
Lead free, RoHS compliant.

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	HR	8/6/15
CHECKED	OC	8/6/15
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE
MMCX SWITCH JACK, EDGE CARD, 50 OHM, PCB MOUNT


SIZE	PART NO.	REV.
X	RF12-32B-T-00-50-G-T/R	B


REF: S00049T | SCALE: NTS | SHEET 1 OF 2

Rev	AWO #	Description	Date	Appr
SEE SHT 1 OF 2 FOR REVISION				

APPROVED: _____

DATE: _____ TITLE: _____

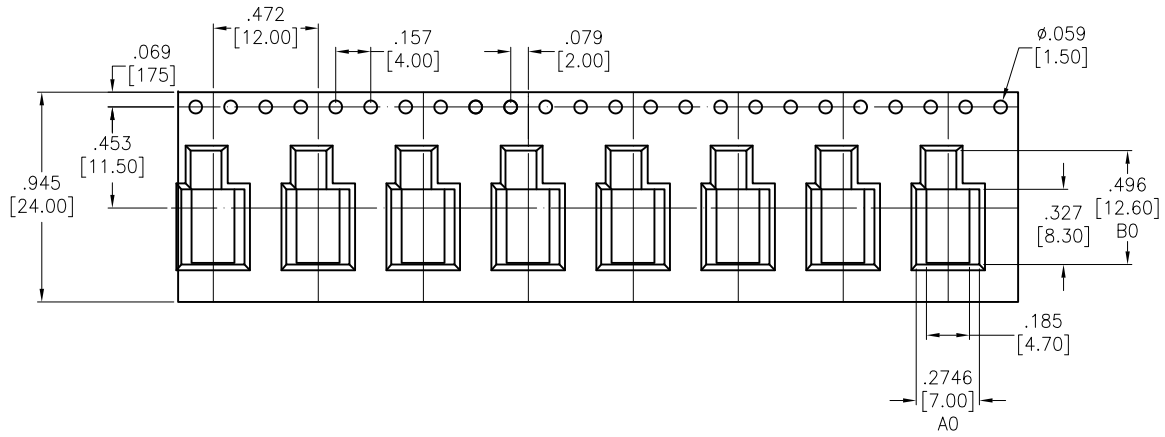



NOTE:
1. 10 sprocket hole pitch cumulative tolerance ±0.2mm
2. Carrier camber is 1mm in 250mm
3. All dimensions meet EIA-481-2A requirements
4. Material: Black PS
5. Thickness: 0.35±0.05mm
6. Packing length per 13" reel: 16.12 meters
7. Componet Loader per reel: 1300+44pcs, 22pcs blank for front and bottom

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	HR	8/6/15
CHECKED	OC	8/6/15
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: MMCX SWITCH JACK, EDGE CARD, 50 OHM, PCB MOUNT

SIZE	PART NO.	REV.
X	RF12-32B-T-00-50-G-T/R	B

REF:	SCALE:	SHEET
S00049T	NTS	2 OF 2