

Rev	AWO #	Description	Date	Appr
-		RELEASED	8/7/17	


APPROVED: _____

DATE: _____ TITLE: _____

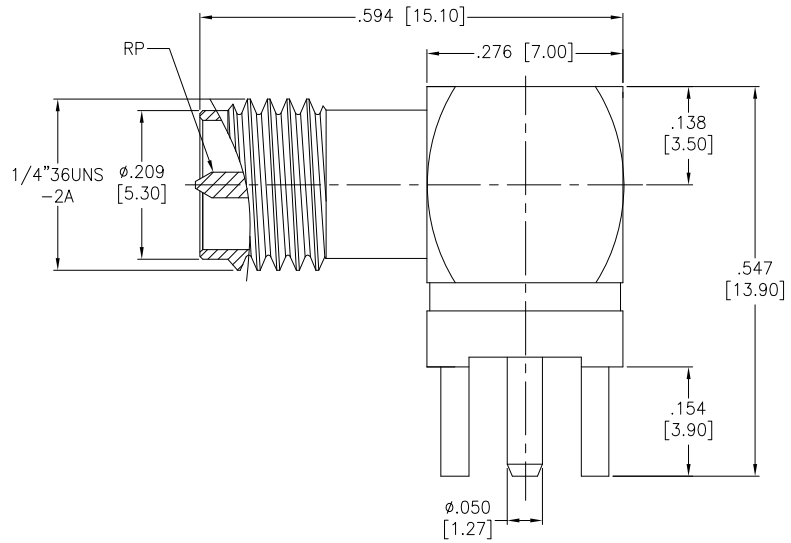

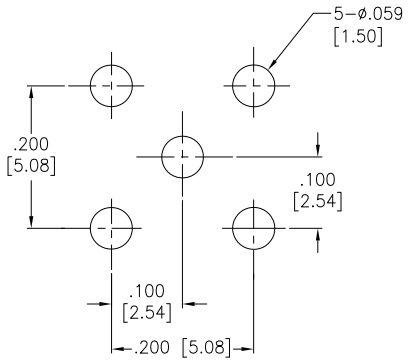

RECOMMENDED P.C.B LAYOUT

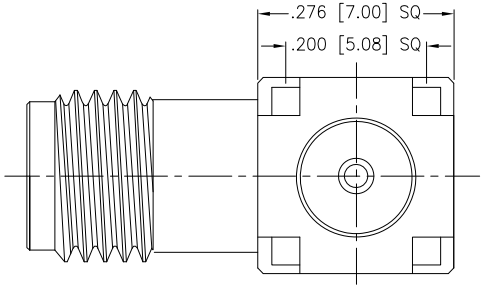

DESCRIPTION	MATERIAL	FINISH
BODY	BRASS	GOLD
CENTER CONTACT	PHOSPHOR BRONZE	GOLD
INSULATOR	TEFLON	NONE

SPECIFICATIONS:

Electrical:

Frequency range: DC-6 GHz

Nominal Impedance: 50 Ohms

VSWR: 1.5 max

Working Voltage: 500 V rms @ sea level

Insulation resistance: 5000 ohms min

Temperature Rating:

Operating temperature: -65°C to +165°C

Environmental:

Lead free, RoHS compliant.

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	AY	8/7/17
CHECKED	YC	8/7/17
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: SMA JACK R/A PCB MOUNT, MALE PIN

SIZE	PART NO.	REV.
X	RF2-03H-T-00-50-G-RP	-

REF: S00291T | SCALE: NTS | SHEET 1 OF 1