
| Rev | AWO # | Description | Date | Appr |
|---|---|---|---|---|
| - | | RELEASED | 1/15/18 | |

APPROVED: _____

DATE: _____ TITLE: _____

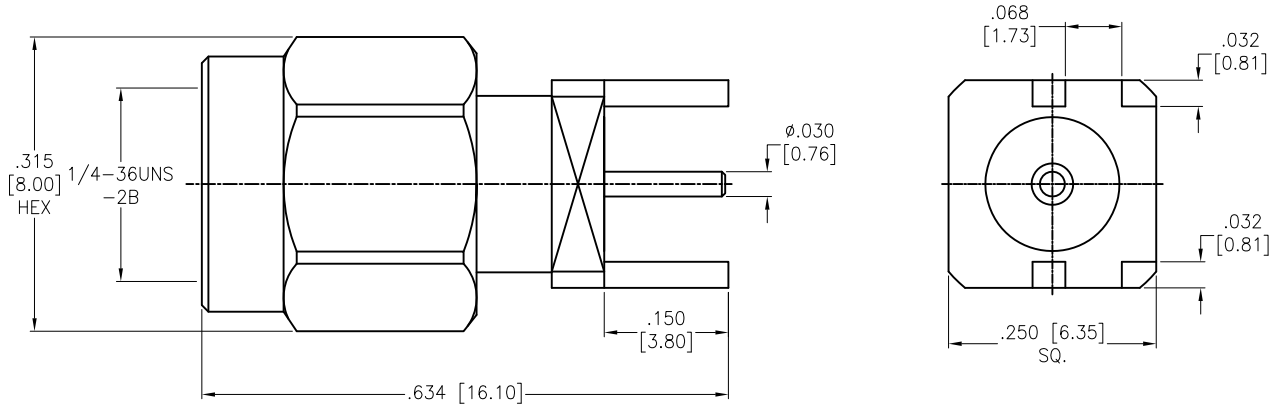


| CONTACT PIN | BRASS | GOLD |
|---|---|---|
| SHELL | BRASS | GOLD |
| GASKET | SILICONE | RED |
| RING | SUS 304 | NATURAL |
| INSULATOR | PTFE | WHITE |
| BODY | BRASS | GOLD |
| DESCRIPTION | MATERIAL | FINISH |

***SPECIFICATIONS:***

Electrical:

Nominal Impedance: 50 ohms

Frequency range: DC–18 GHz

Working voltage: 335 VOLTS max.

Proof voltage: 1,000 VOLTS

Temperature Rating:

Operating temperature: –65°C to +165°C

Environmental:

Lead free, RoHS compliant.

RoHS COMPLIANT

MAX. BOARD THICKNESS=1.60mm

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

| INCHES | | HOLES | |
|---|---|---|---|
| .X | ± .10 | Ø.X | ±.10 |
| .XX | ± .020 | Ø.XX | ±.015 |
| .XXX | ± .015 | Ø.XXX | ±.010 |

| APPROVALS | | DATE |
|---|---|---|
| DRAWN | AY | 1/15/18 |
| CHECKED | AC | 1/15/18 |
| APPROVED | | |


ADAM TECH INTERCONNECTS
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710


TITLE

RF CONNECTOR, SMA STR EDGE MOUNT

| SIZE | PART NO. | REV. |
|---|---|---|
| X | RF2-154A-T-17-50-G | - |

| REF: | SCALE: | SHEET |
|---|---|---|
| S00277T | NTS | 1 OF 1 |