


Rev	AWO #	Description	Date	Appr
-		RELEASED	3/30/21	

APPROVED: _____

DATE: _____ TITLE: _____

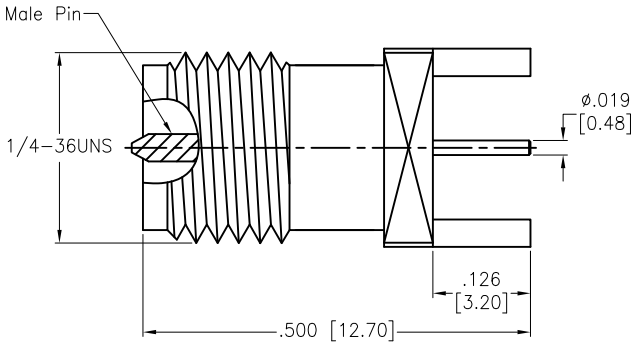



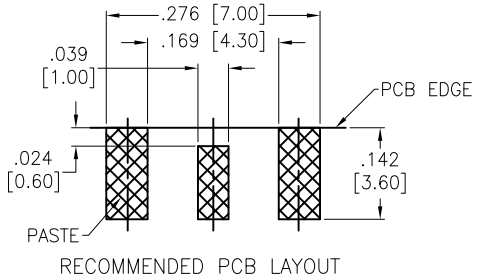

RECOMMENDED PCB LAYOUT

DESCRIPTION	MATERIAL	FINISH
BODY	BRASS	GOLD
INSULATOR	TEFLON	NONE
CENTER PIN	BRASS	GOLD

SPECIFICATIONS:

Electrical:

Nominal Impedance: 50 ohms

Frequency range: DC–18 GHz

Working voltage: 335 Volts max.

Proof voltage: 1,000 Volts

Temperature Rating:

Operating temperature: –65°C to +165°C

Environmental:

Lead free, RoHS compliant.

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	LH	3/30/21
CHECKED	YC	3/30/21
APPROVED		

ADAM TECH
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE: SMA JACK, REVERSE POLARITY, MALE PIN, EDGE MOUNT

SIZE	PART NO.	REV.
X	RF2-22-T-17-50-G-RP	-

REF:	SCALE:	SHEET
S00277T	NTS	1 OF 1