
APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	9/15/06	
A	7787	Added Reverse Polarity to Description	9/21/06	
B	7787	REDRAWN	9/26/11	
C		REVISED SHAPE	10/16/12	
D		REVISED SPEC.	4/8/15	AY/LW
E		REVISED SPEC.	9/20/16	AY/IC

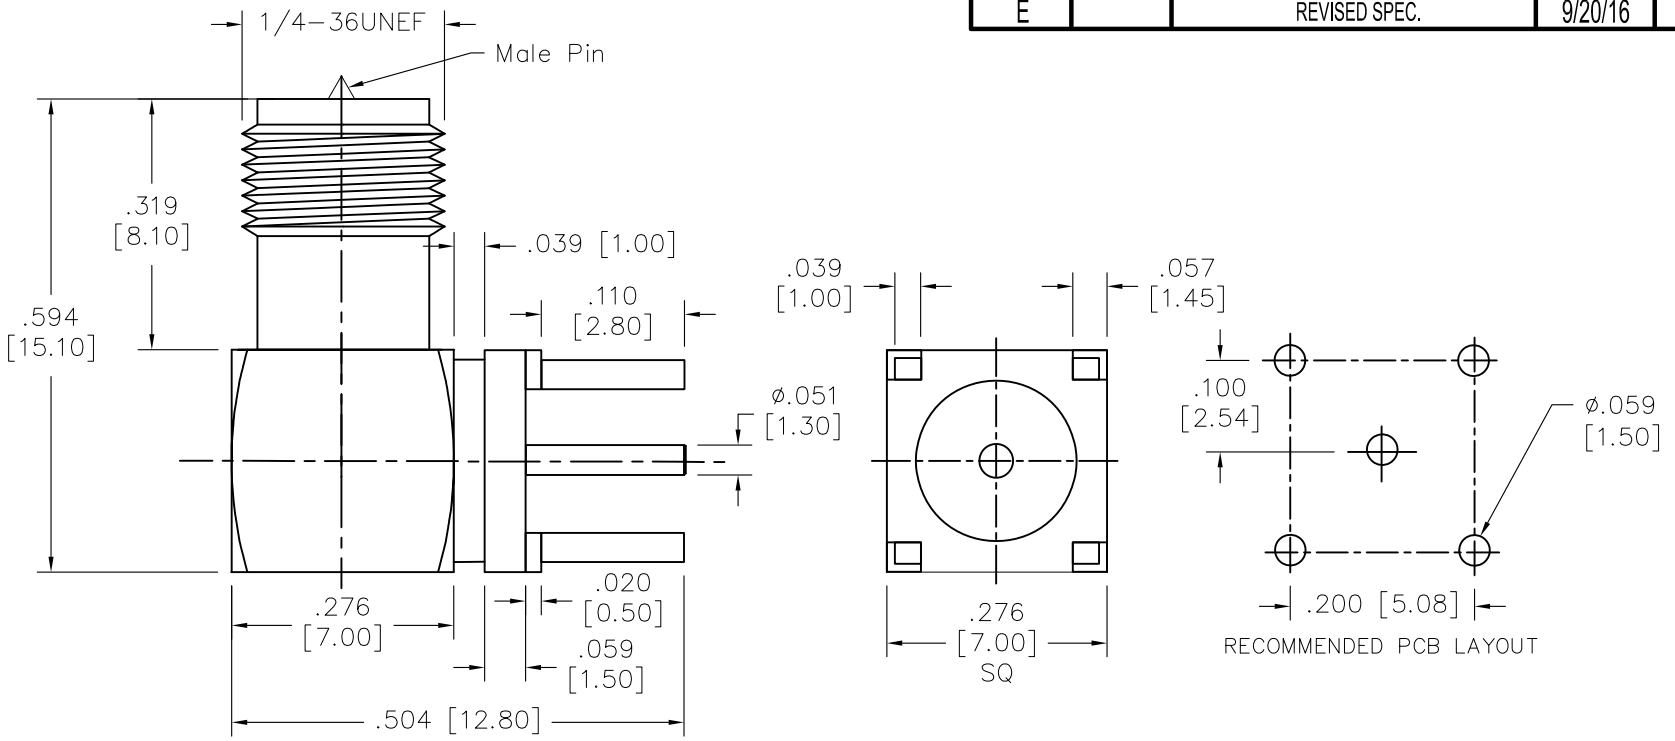

DESCRIPTION	MATERIAL	FINISH
CHASDSIS	BRASS	GOLD
INSULATOR B	TEFLON	NONE
PIN	BRASS	GOLD
INSULATOR A	TEFLON	NONE
BODY	BASS	GOLD

SPECIFICATIONS:

Electrical:

Frequency range: 0-18 GHz

Contact Resistance: 6 Milliohms max. (Center Contact)
2 Milliohms max. (Outer Contact)

Insulator Resistance: 5000 Megohms min.

Environmental:

Lead free, RoHS compliant.

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE MM [INCHES]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	SS	2/9/06
CHECKED		
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: SMA, RIGHT ANGLE, PCB MOUNT, 50 OHM REVERSE POLARITY, MALE PIN

SIZE	PART NO.	REV.
X	RF2-25-T-00-50-G	D

REF:	SCALE:	SHEET
S00011T	NTS	1 OF 1