


Rev	AWO #	Description	Date	Appr
-		RELEASED	09/17/12	


APPROVED: _____

DATE: _____ TITLE: _____

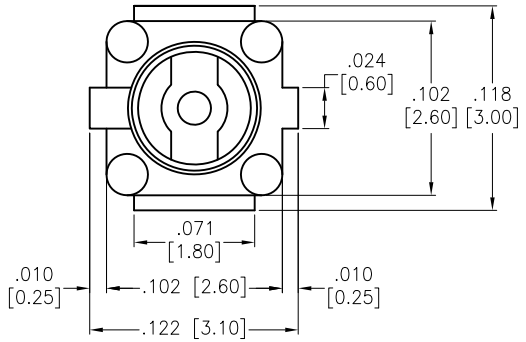

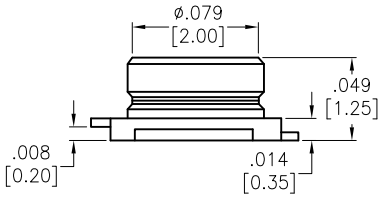



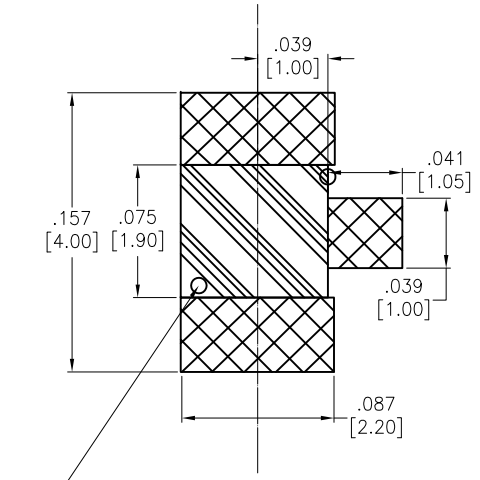

RECOMMENDED PCB LAYOUT

SPECIFICATIONS:
Material:
Insulator: Hi-Temp Thermoplasitc, rated UL 94V-0
Insulator color: White
Ground Contact: Phosphor Bronze, Gold plated
Contacts: Brass, Gold plated.
Electrical:
Nominal Impedance: 50 ohms.
Voltage rating: 60 VAC.
Contact resistance: 20 mohms max.
Insulation resistance: 500 Mohms min DC 100V.
Dielectric withstanding voltage: 200 VAC for 1 minute
Temperature Rating:
Operating temperature: -40°C to +90°C
Environmental:
Lead free, RoHS compliant.

RoHS COMPLIANT

PACKAGED ON TAPE & REEL

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	TW	09/17/12
CHECKED	AY	09/17/12
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: RF CONNECTOR, TYPE MHF, 50 OHMS VERTICAL, TAPE & REEL PACKAGING

SIZE	PART NO.	REV.
X	RF20-01L-P-00-50-G-T/R	-

REF: S00049T | SCALE: NTS | SHEET 1 OF 1