
APPROVED: _____


DATE: _____ TITLE: _____


Rev	AWO #	Description	Date	Appr
-		RELEASED	8/2/18	
A		UPDATE DRAWING	8/8/18	AY/RC

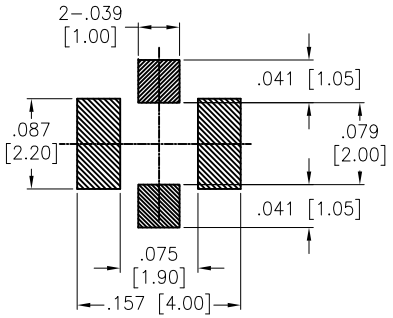



SIGNAL CONTACT GROUND CONTACT

RECOMMENDED PCB LAYOUT

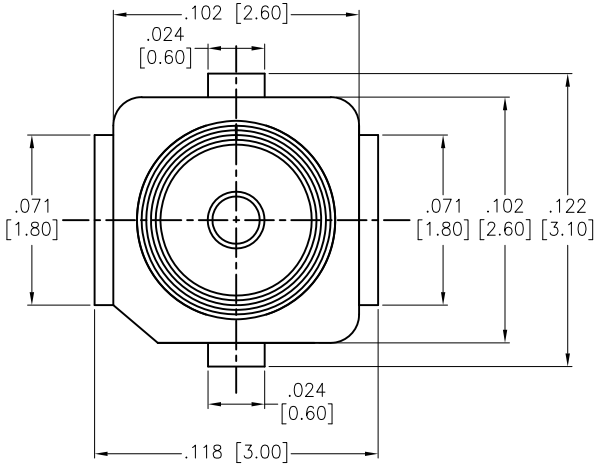

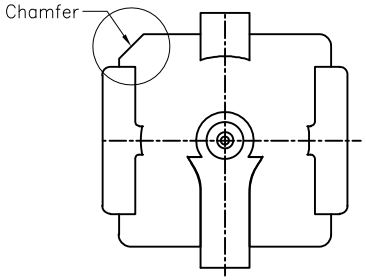

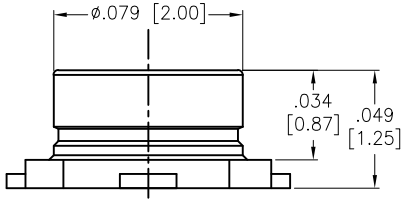

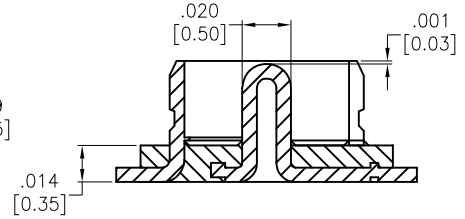

HOUSING	LCP UL94V–0	
CENTER PIN	COPPER ALLOY	GOLD over NICKEL
GROUND PAD	COPPER ALLOY	GOLD over NICKEL
DESCRIPTION	MATERIAL	FINISH

Electrical:
Current rating: 0.5 Amp max
Impedance: 50Ω Nominal
Mechanical:
VSWR up to 3GHz: 1.3 max
3GHz to 6GHz: 1.4 max
Durability: 30 cycles
Temperature Rating:
Operating temperature: –40°C to +90°C
Environmental:
Lead free, RoHS compliant

RoHS COMPLIANT

PACKAGED ON TAPE & REEL

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	AY	8/2/18
CHECKED	RC1	8/2/18
APPROVED		

ADAM TECH INTERCONNECTS
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE: RF HEADER (U.FL), RECEPTACLE VERTICAL, 50 OHM, PCB MOUNT

SIZE	PART NO.	REV.
X	RF28-04A-L-00-50-G-T/R	A

REF: S000179C | SCALE: NTS | SHEET 1 OF 1