


APPROVED: _____


DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	8/23/12	
A		UPDATED DIM.	11/19/15	HR
B		UPDATED DRAWING	3/8/16	HR

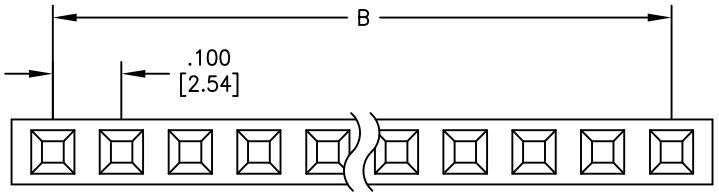

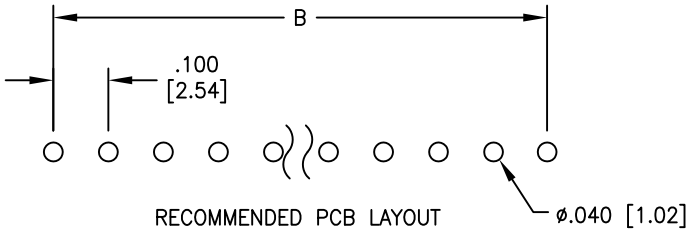

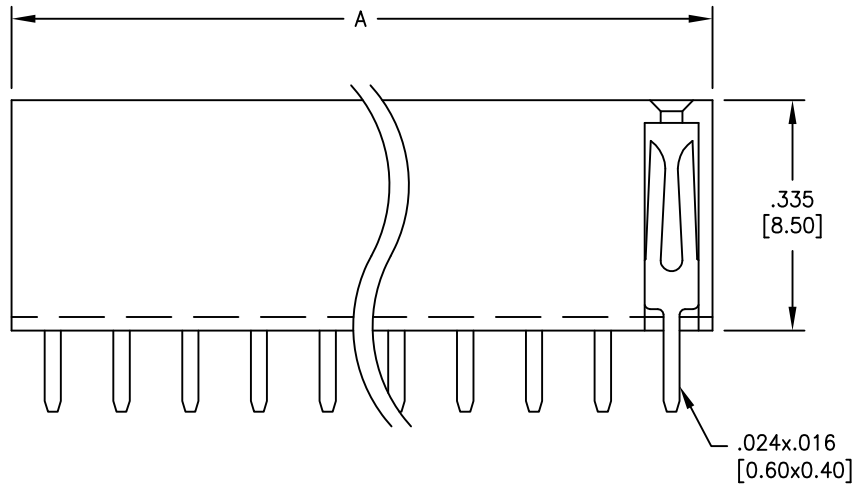

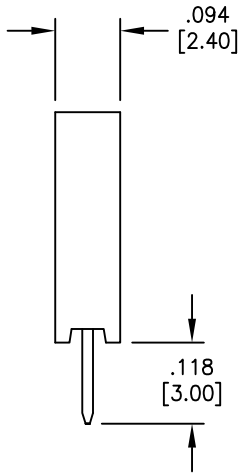

SPECIFICATIONS:

Material:

Insulator: Hi–temp thermoplastic, rated UL 94V–0

Insulator color: Black

Contacts: Brass

Plating:

Gold flash over Nickel underplate overall

Electrical:

Current rating: 3 Amps max.

Contact resistance: 20 mohms max. initial

Insulation resistance: 5,000 Mohms min.

Temperature Rating:

Operating temperature: –40°C to +105°C

Environmental:

Lead free, RoHS compliant.

RoHS COMPLIANT

Positions: 2 thru 40

A = .100 [2.54] X No. of Positions + .020 [0.50]

B = .100 [2.54] X No. of Spaces

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	AY	8/23/12
CHECKED	AH	8/23/12
APPROVED		

ADAM TECH

909 Rahway Avenue, Union, NJ 07083

Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .100 RECEPTACLE STRIP, SINGLE ROW STRAIGHT, PCB TAILS

SIZE	PART NO.	REV.
X	RS1-XX-G-HT	B

REF:	SCALE:	SHEET
S00059T	NTS	1 OF 1