
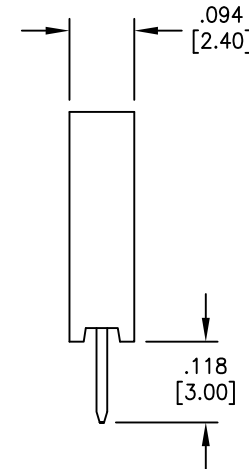
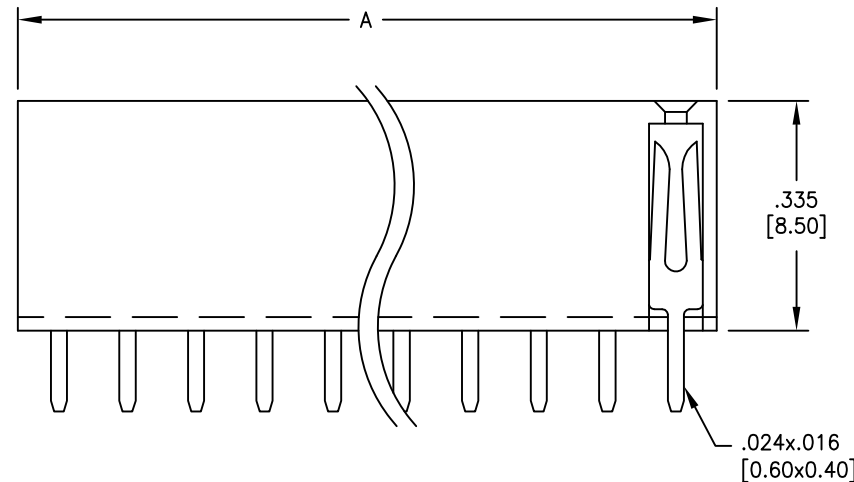
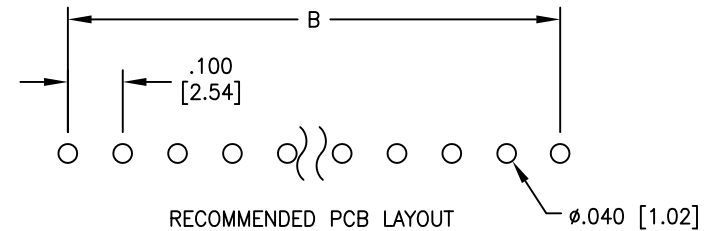


APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	04/14/05	
A		REVISED DIM.	11/30/10	
B		UPDATED DIM.	11/19/15	HR
C		UPDATED DRAWING	3/8/16	HR

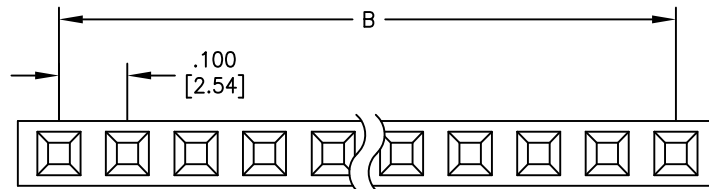

SPECIFICATIONS:

Material:

Insulator: PBT, glass reinforced, rated UL 94V-0

Insulator color: Black

Contacts: Brass

Plating:

Gold Flash over Nickel underplate on mating area,

Tin over Copper underplate on PCB tails

Electrical:

Current rating: 3 Amps max.

Contact resistance: 20 mohms max. initial

Insulation resistance: 5,000 Mohms min.

Temperature Rating:

Operating temperature: -40°C to +105°C

Environmental:

Lead free, RoHS compliant.



Positions: 2 thru 40

A = .100 [2.54] X No. of Positions + .020 [0.50]

B = .100 [2.54] X No. of Spaces

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES HOLES .X ± .10 Ø.X ± .10 .XX ± .020 Ø.XX ± .015 .XXX ± .015 Ø.XXX ± .010			ADAM TECH 909 Rahway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710		
APPROVALS		DATE	TITLE		
DRAWN	SS	04/14/05	.100 RECEPTACLE STRIP, SINGLE ROW STRAIGHT, PCB TAILS		
CHECKED			SIZE	PART NO.	REV.
APPROVED			X	RS1-XX-SG	C
REF: S00059T		SCALE: NTS	SHEET 1 OF 1		