
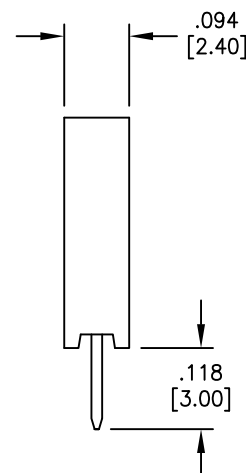
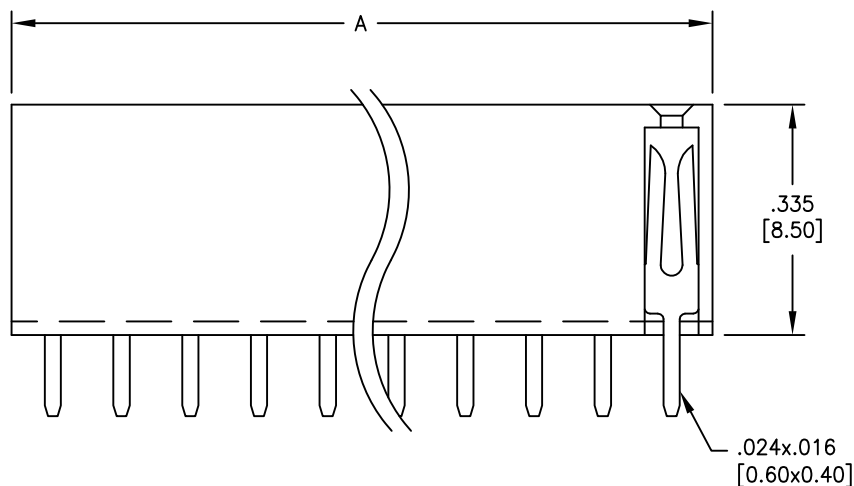
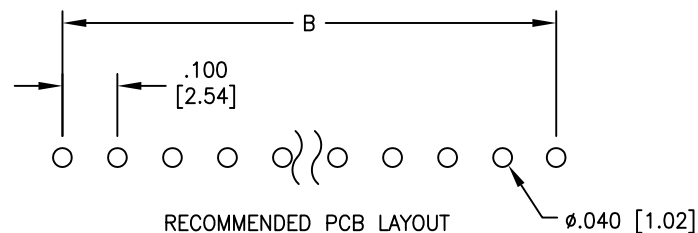


APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	04/14/05	
A		UPDATED DIM.	11/13/15	HR
B		UPDATED DRAWING	3/8/16	HR

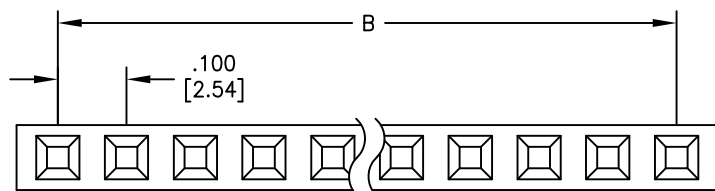

SPECIFICATIONS:

Material:

Insulator: PBT, glass reinforced, rated UL 94V-0

Insulator color: Black

Contacts: Brass

Plating:

Tin ver Copper underplate overall

Electrical:

Current rating: 3 Amps max.

Contact resistance: 20 mohms max. initial

Insulation resistance: 5,000 Mohms min.

Temperature Rating:

Operating temperature: -40°C to +105°C

Environmental:

Lead free, RoHS compliant.



A = .100 [2.54] X No. of Positions + .020 [0.50]

B = .100 [2.54] X No. of Spaces

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES HOLES .X ± .10 Ø.X ± .10 .XX ± .020 Ø.XX ± .015 .XXX ± .015 Ø.XXX ± .010			ADAM TECH 909 Rahway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710		
APPROVALS			TITLE .100 RECEPTACLE STRIP, SINGLE ROW STRAIGHT, PCB TAILS		
DRAWN	SS	04/14/05	SIZE X	PART NO. RS1-XX-T	REV. B
CHECKED			REF:	SCALE: NTS	SHEET 1 OF 1
APPROVED					