
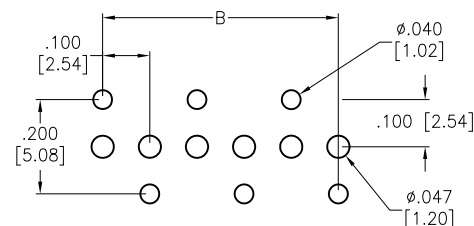




APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	11/15/12	
A		UPDATED DRAWING	9/1/17	HR/DH
B		UPDATED DIM.	12/4/18	HR/DH

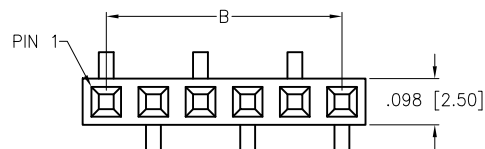

RECOMMENDED PCB LAYOUT

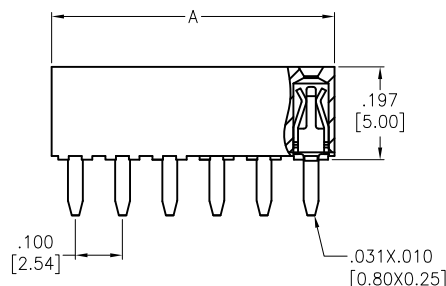

SPECIFICATIONS:

Material:

Insulator: PBT, glass reinforced, rated UL 94V-0

Insulator color: Black

Contacts: Phosphor Bronze

Plating:

Gold Flash over Nickel underplate on contact area,

Tin over Copper underplate on tails

Electrical:

Current rating: 3 Amp

Contact resistance: 20 mohms max.

Insulation resistance: 5,000 Mohms min.

Dielectric withstanding voltage: 500 VAC for 1 minute

Environmental:

Lead free, RoHS compliant



A = .100 [2.54] x No. of Positions

B = .100 [2.54] x No. of Spaces

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED
INCHES HOLES
.X ± .10 Ø.X ± .10
.XX ± .020 Ø.XX ± .015
.XXX ± .015 Ø.XXX ± .010

APPROVALS

DATE

DRAWN AY 11/15/12

CHECKED SC 11/15/12

APPROVED

ADAM
TECH
INTERCONNECTS

909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE
.100 [2.54] SINGLE ROW RECEPTACLE STRIP
DUAL ENTRY, .197 [5.00] HEIGHT, TYPE A

SIZE X PART NO. RS1BE-B-XX-SG-A REV. B

REF: S00059T SCALE: NTS SHEET 1 OF 1