Rev	AWO #	Description	Date	Appr
-		RELEASED	6/1/18	

APPROVED: _____

DATE: _____ TITLE: _____

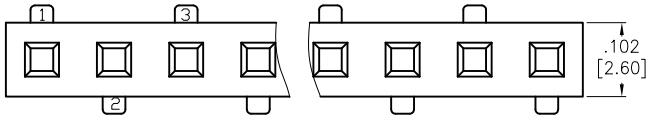

RS1BEY-B-XX-G-A-HT

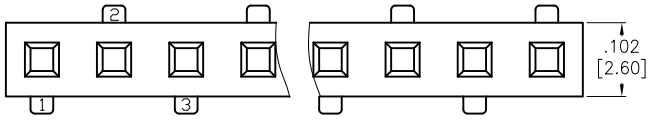

RS1BEY-B-XX-G-B-HT

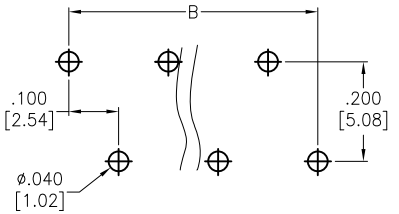

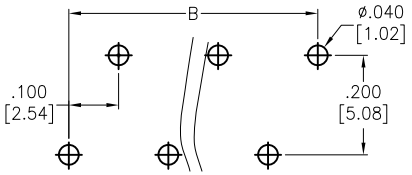

RECOMMENDED PCB LAYOUT

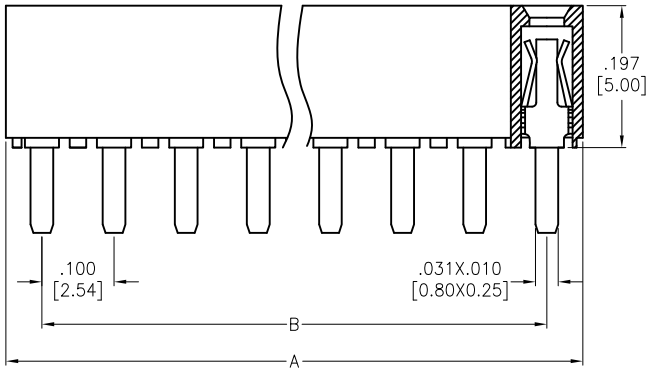



SPECIFICATIONS:
Material:
Insulator: Hi-Temp Thermoplastic, rated UL 94V-0
Insulator color: Black
Contacts: Copper Alloy
Plating:
Gold flash over Nickel underplate overall
Electrical:
Current rating: 3 Amp
Contact resistance: 20 mohms max.
Insulation resistance: 1,000 Mohms min.
Dielectric withstanding voltage: 500 VAC
Temperature Rating:
-40°C to +105°C
Environmental:
Lead free, RoHS compliant

RoHS COMPLIANT

Positions: 01 thru 40
A= .100 [2.54] x No. of Positions + .020 [0.50]
B= .100 [2.54] x No. of Spaces

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	HR	6/1/18
CHECKED	TY	6/1/18
APPROVED		

ADAM TECH INTERCONNECTS
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE: .100 [2.54] SINGLE ROW RECEPTACLE STRIP DUAL ENTRY, .197 [5.00] HEIGHT, TYPE A/B

SIZE	PART NO.	REV.
X	RS1BEY-B-XX-G-X-HT	-

REF: S00111C | SCALE: NTS | SHEET 1 OF 1