
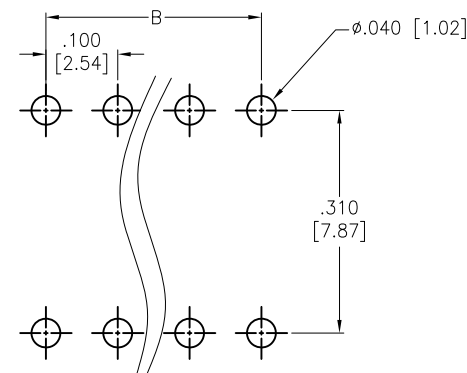




APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	2/20/08	
A		REDRAWN	11/15/13	YC/HR
B		UPDATE SPEC.	5/13/21	WX/KL

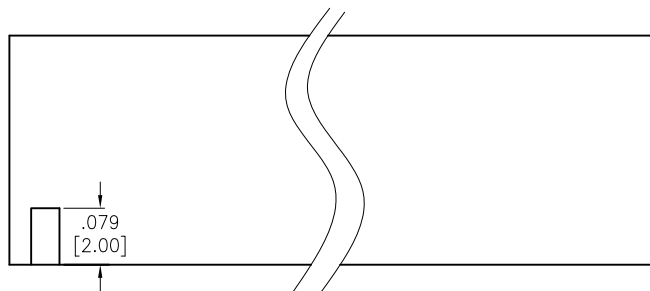

RECOMMENDED PCB LAYOUT

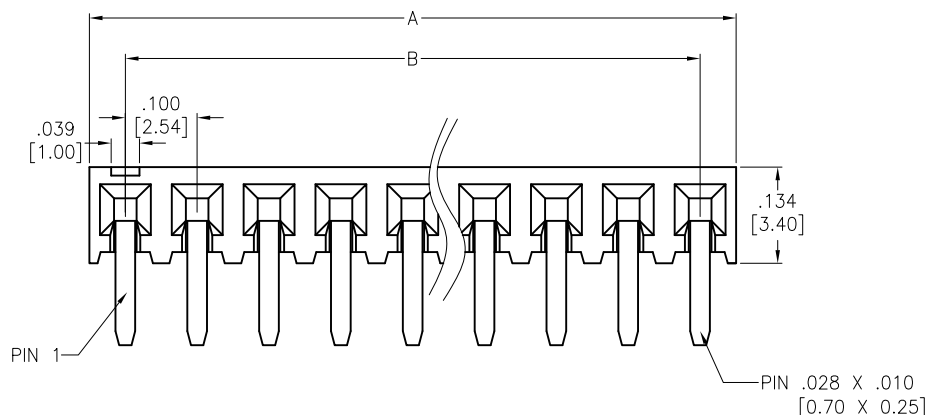

SPECIFICATIONS:



Material:

Insulator: Hi-Temp Thermoplastic, rated UL 94V-0

Insulator color: Black

Contacts: Phosphor Bronze

Plating:

Tin over Copper underplate overall

Electrical:

Operating voltage: 250 VAC max.

Current rating: 3 Amps max.

Contact resistance: 20 mohms max. initial

Insulation resistance: 1,000 Mohms min.

Dielectric withstanding voltage: 600 VAC for 1 minute

Temperature Rating:

Operating temperature: -40°C to +105°C

Environmental:

Lead free, RoHS compliant



Positions: 2 thru 80

A = .100 [2.54] x No. of Positions per Row

B = .100 [2.54] x No. of Spaces

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS
ARE INCHES [MM]. TOLERANCES: EXCEPT AS NOTED

INCHES	HOLES
.X ± .10	ØX ± .10
.XX ± .020	ØXX ± .015
.XXX ± .015	ØXXX ± .010

DRAWN	SS	2/20/08
CHECKED		
APPROVED		

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY
AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN
PERMISSION FROM ADAM TECH

**ADAM
TECH**

909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE
.100 [2.54] SINGLE ROW RECEPTACLE STRIP
RIGHT ANGLE, TIN PLATED

SIZE X	PART NO. RS1BR-XX-T	REV. B
REF: S00032T	SCALE: NTS	SHEET 1 OF 1