APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	5/28/18	
A		UPDATE DIM. A	4/10/20	AY/EY
B		UPDATE SPEC.	1/20/21	LH/DH

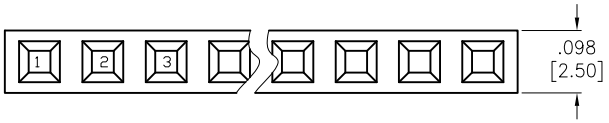

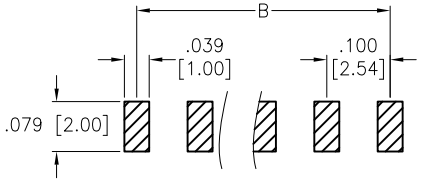

RECOMMENDED PCB LAYOUT

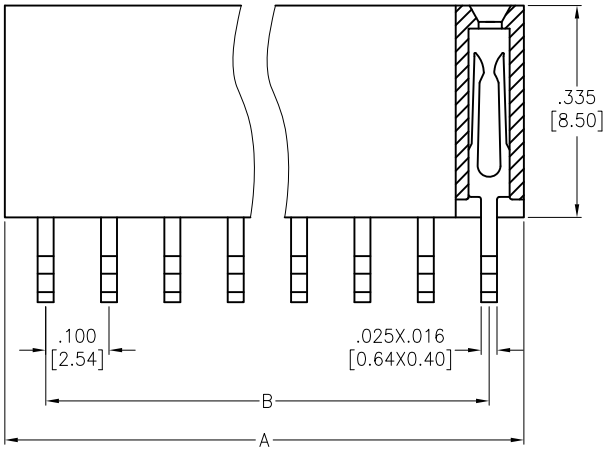

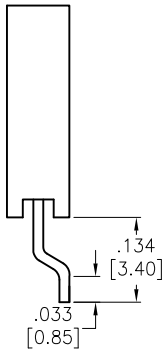

SPECIFICATIONS:

Material:

Insulator: (LCP) Hi-Temp Termoplastic, rated UL94V-0

Insulator color: Black

Contacts: Copper Alloy

Plating:

Gold flash over Nickel underplate overall

Electrical:

Current rating: 3 Amp

Contact resistance: 20 mohms max.

Insulation resistance: 1,000 Mohms min.

Dielectric withstanding voltage: 500 VAC for 1 minute

Temperature Rating:

-40°C to +105°C

Environmental:

Lead free, RoHS compliant

RoHS COMPLIANT

PACKAGED ON TAPE & REEL

Positions: 01 thru 40

A= .100 [2.54] x No. of Positions + .020 [0.50]

B= .100 [2.54] x No. of Spaces

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	HR	5/28/18
CHECKED	DH	5/28/18
APPROVED		

ADAM TECH

909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE: .100 [2.54] SINGLE ROW RECEPTACLE STRIP RIGHT ANGLE, SMT TYPE, .335 [8.50] HEIGHT

SIZE	PART NO.	REV.
X	RS1R-B-XX-G-SMT-T/R	B

REF:	SCALE:	SHEET
S00111C	NTS	1 OF 1