

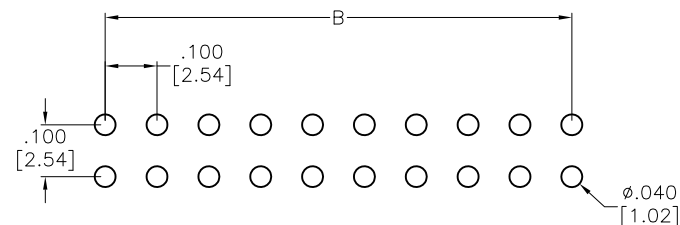
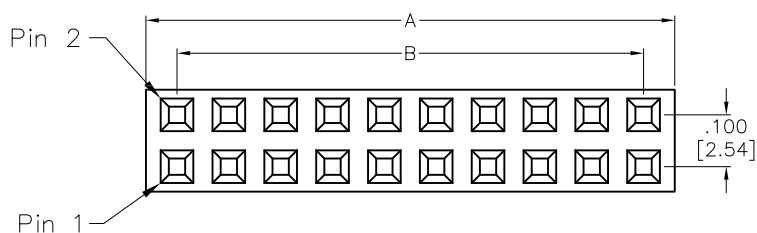


APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	9/6/17	

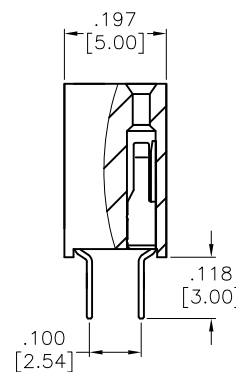

RECOMMENDED PCB LAYOUT

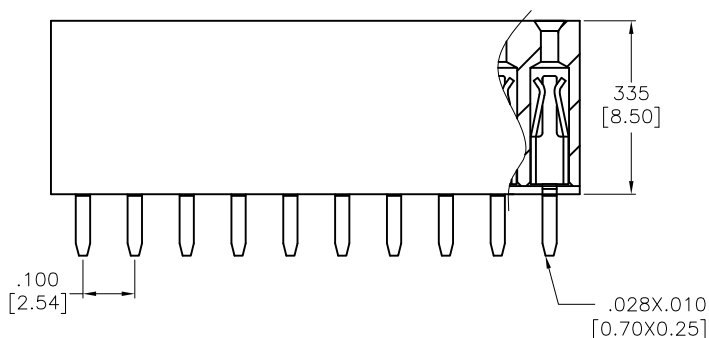

SPECIFICATIONS:

Material:

Insulator: PBT, glass reinforced, rated UL 94V-0

Insulator color: Black

Contacts: Phosphor Bronze

Plating:

Gold flash over Nickel underplate overall

Electrical:

Current rating: 3 Amp.

Contact resistance: 20 mohms max.

Insulation resistance: 5,000 Mohms min.

Dielectric withstanding voltage: 500 VAC for 1 minute

Temperature Rating:

Operating temperature: -40°C to +105°C

Environmental:

Lead free, RoHS compliant



Positions: 04 thru 80

A = 04~20P: .100 [2.54] x No. of Positions Per row

22~80P: .100 [2.54] x No. of Positions Per row +.016 [0.40]

B = .100 [2.54] x No. of Spaces

UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED
 INCHES HOLES
 .X ± .10 Ø.X ± .10
 .XX ± .020 Ø.XX ± .015
 .XXX ± .015 Ø.XXX ± .010

APPROVALS DATE

DRAWN AY 9/6/17

CHECKED SL 9/6/17

APPROVED

ADAM TECH

909 Rahway Avenue, Union, NJ 07083

Phone: 908-687-5000 Fax: 908-687-5710

TITLE .100 [2.54] RECEPTACLE STRIP, DUAL ROW
 .335 [8.50] HEIGHT, GOLD PLATED

SIZE X PART NO. RS2-A1-XX-G REV. -

REF: S00059T SCALE: NTS SHEET 1 OF 1