

Rev	AWO #	Description	Date	Appr
-		RELEASED	8/22/19	


APPROVED: _____


DATE: _____ TITLE: _____

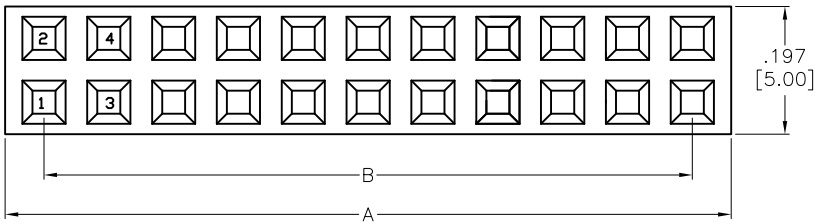

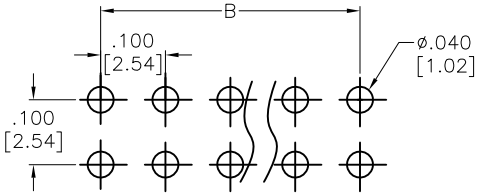

RECOMMENDED PCB LAYOUT

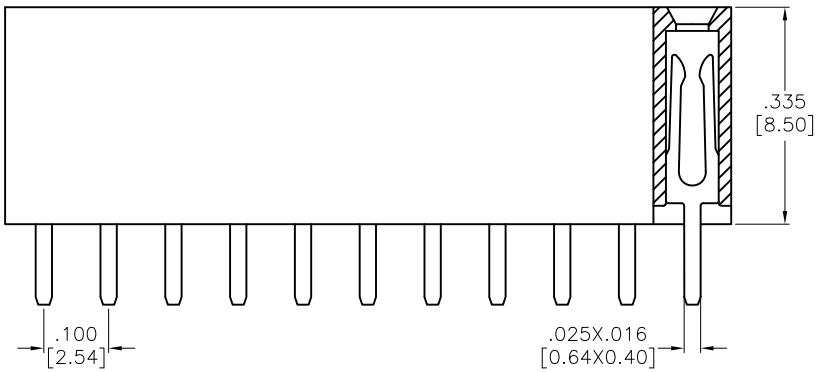

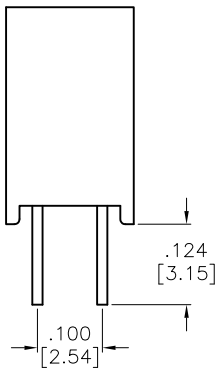

SPECIFICATIONS:
Material:
Insulator: PBT, glass reinforced, rated UL 94V–0
Insulator color: Black
Contacts: Phosphor Bronze
Plating:
Gold flash over Nickel underplate overall
Electrical:
Current rating: 3 Amp
Contact resistance: 20 mohms max
Insulation resistance: 1,000 Mohms min
Dielectric withstanding voltage: 500 VAC
Temperature Rating:
–40°C to +105°C
Environmental:
Lead free, RoHS compliant

RoHS COMPLIANT

Positions: 02 thru 80
A = .100 [2.54] x No. of Positions Per row + .020 [0.50]
B = .100 [2.54] x No. of Spaces

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	AY	8/22/19
CHECKED	NP	8/22/19
APPROVED		

ADAM TECH INTERCONNECTS
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE
.100 [2.54] RECEPTACLE STRIP, DUAL ROW
.335 [8.50] HEIGHT, GOLD FLASH PLATED

SIZE	PART NO.	REV.
X	RS2-A5-XX-G	-

REF: S00111C | SCALE: NTS | SHEET 1 OF 1