

APPROVED: _____


DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	7/19/16	
A		UPDATE DIM.A	11/9/17	AY

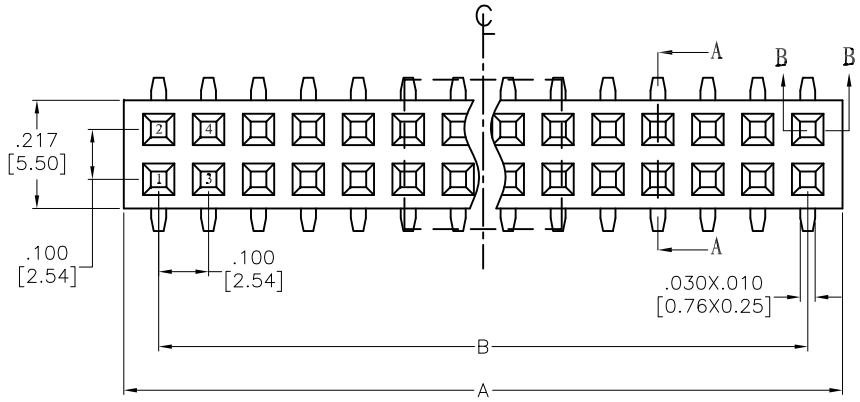


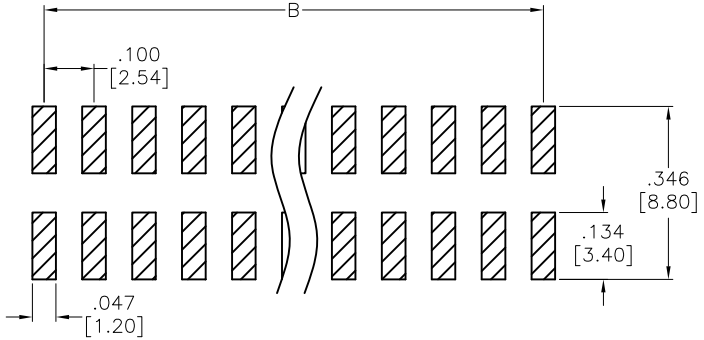

RECOMMENDED PCB LAYOUT

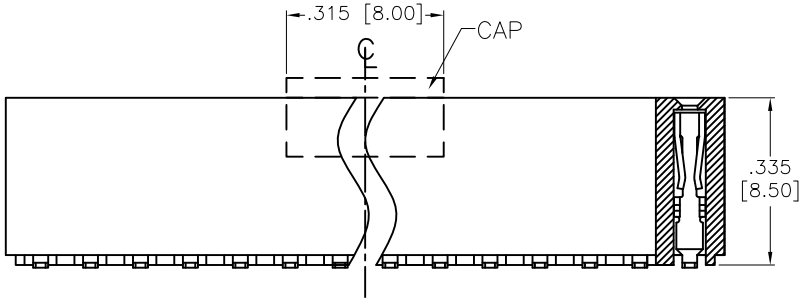

SECTION B–B



SECTION A–A

SPECIFICATIONS:
Material:
Insulator: Hi–temp thermoplastic, rated UL 94V–0
Insulator color: Black
Contacts: Phosphor Bronze
Plating:
Gold flash over Nickel underplate overall
Electrical:
Current rating: 3 Amp.
Contact resistance: 20 mohms max.
Insulation resistance: 1000 Mohms min.
Dielectric withstanding voltage: 1000 VAC/DC
Temperature Rating:
Operating temperature: –40°C to +105°C
Environmental:
Lead free, RoHS compliant

RoHS COMPLIANT

PACKAGED ON TAPE & REEL
Positions: 04 thru 80
A = .100 [2.54] x No. of Positions Per row +.039 [1.00]
B = .100 [2.54] x No. of Spaces

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	AY	7/19/16
CHECKED	YC	7/19/16
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .100 [2.54] RECEPTACLE STRIP, DUAL ROW .335 [8.50] HEIGHT, GOLD PLATED, SMT

SIZE	PART NO.	REV.
X	RS2-XX-G-SMT-001C-PP-T/R	A

REF: S00019C | SCALE: NTS | SHEET 1 OF 1