

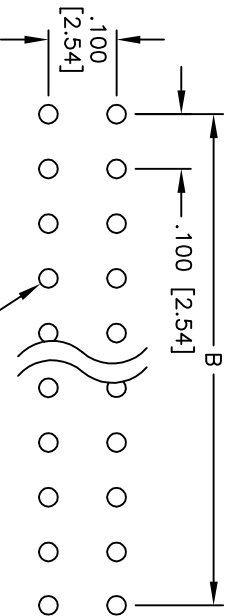
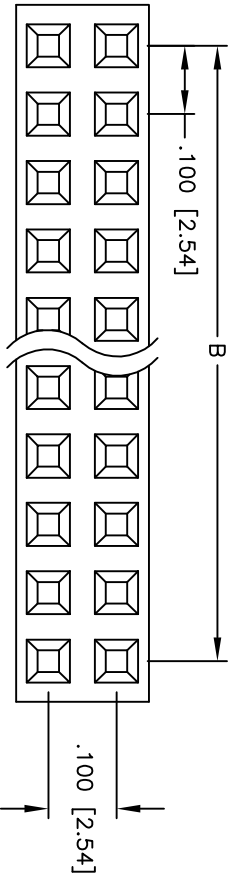


Rev	AWO #	Description	Date	Appr
-		RELEASED	5/31/05	

APPROVED: _____
DATE: _____ TITLE: _____

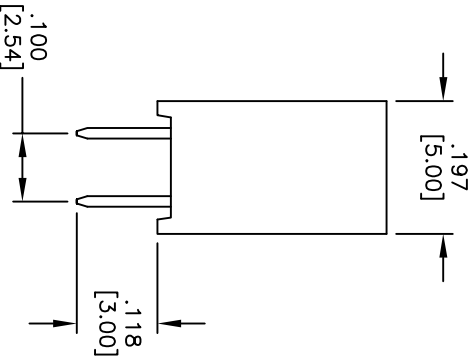

RECOMMENDED
PCB LAYOUT

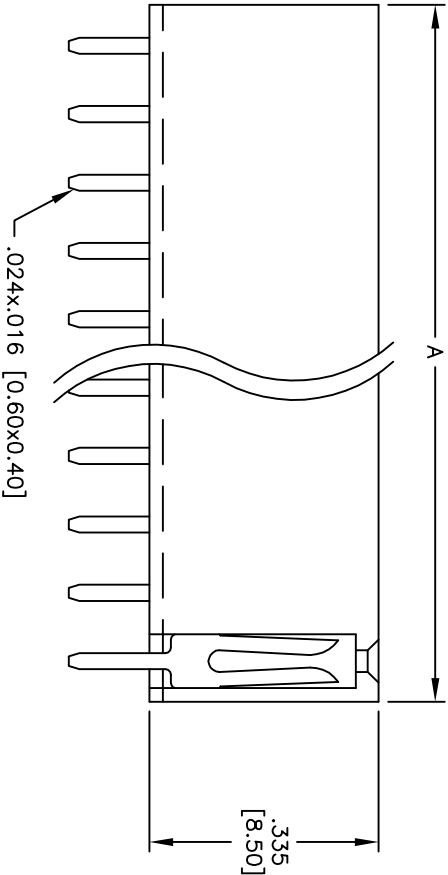

SPECIFICATIONS:

Material:

Insulator: PBT, glass reinforced, rated UL 94V-0

Insulator color: Black

Contacts: Brass

Plating:

Gold over Nickel underplate on contact area Tin over

Copper Underplate on solder tails

Electrical:

Current rating: 3 Amps max.

Contact resistance: 20 mohms max. initial

Insulation resistance: 5,000 Mohms min.

Dielectric withstanding voltage: 500 VAC for 1 minute

Temperature Rating:

Operating temperature: -40°C to +105°C

Environmental:

Lead free, RoHS compliant



Positions: 04 thru 80
A = .100 [2.54] x No. of Positions per Row + .020 [0.50]
B = .100 [2.54] x No. of Spaces

ADAM TECH

909 Railway Avenue, Union, NJ 07083

Phone: 908-687-5000 Fax: 908-687-5710

TITLE
.100 x .100 DUAL ROW RECEPTACLE STRIP
.335 [8.50] HEIGHT

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES				ADAM TECH 909 Rahway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710			
.X	± .10	ØX	± .10	DRAWN	SS	5/31/05	SIZE
.XX	± .020	ØXX	± .015				PART NO.
.XXX	± .015	ØXXX	± .010				RS2-XX-SG
APPROVALS				DATE			
TITLE				.100 x .100 DUAL ROW RECEPTACLE STRIP .335 [8.50] HEIGHT			
CHECKED							REV.
APPROVED							-
REF.		SCALE	INCHES	SHEET 1 OF 1			