
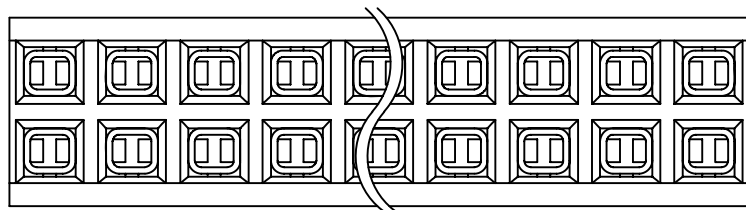





APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	1/30/20	

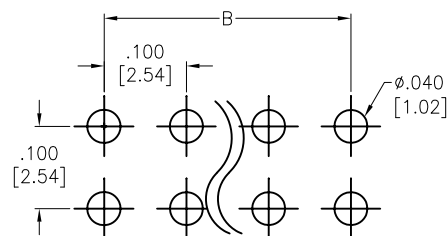

RECOMMENDED PCB LAYOUT

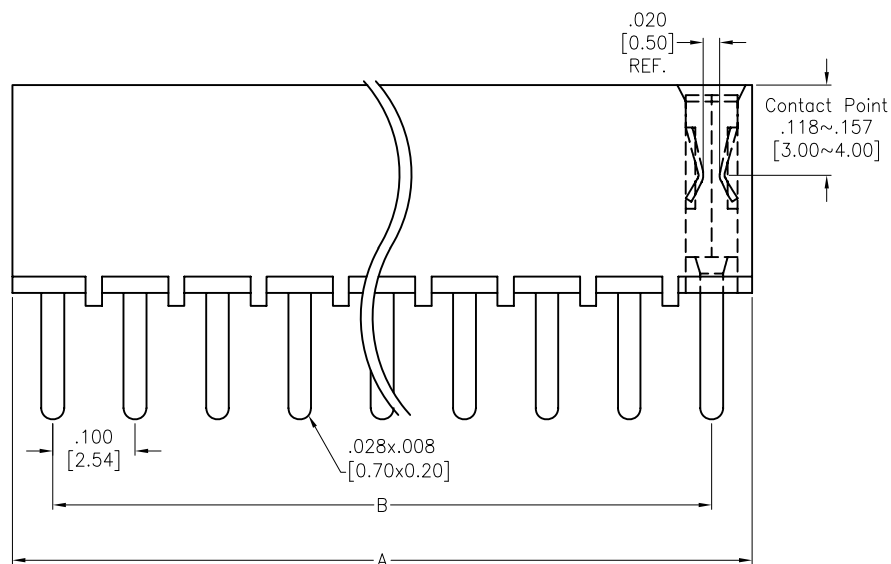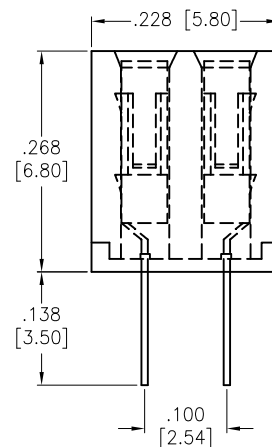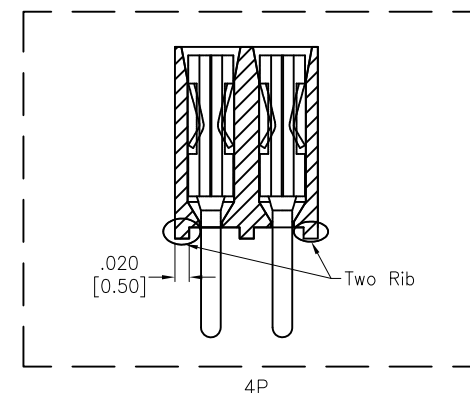

SPECIFICATIONS:

Material:

Insulator: PBT, glass reinforced, rated UL 94V-0

Insulator color: Black

Contacts: Phosphor Bronze

Plating:

30u" Gold over Nickel underplate on contact area,

Tin over Copper underplate on solder tails

Electrical:

Current rating: 3 Amp.

Contact resistance: 20 mohms max.

Insulation resistance: 1,000 Mohms min.

Dielectric withstanding voltage: 600 VAC

Temperature Rating:

Operating temperature: -40°C to +105°C

Environmental:

Lead free, RoHS compliant



Positions: 04 thru 60

A = .100 [2.54] x No. of Positions per Row

B = .100 [2.54] x No. of Spaces

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED				<div>ADAM TECH</div> INTERCONNECTS <div>909 Rahway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710</div>	
INCHES		HOLES			
.X ± .10 .XX ± .020 .XXX ± .015	Ø.X ± .10 Ø.XX ± .015 Ø.XXX ± .010				
APPROVALS		DATE		TITLE <div>.100 x .100 DUAL ROW RECEPTACLE STRIP .268 [6.80] HEIGHT, 30u" SEL GOLD PLATED</div>	
DRAWN	AY	1/30/20			
CHECKED	KL	1/30/20			
APPROVED					
		SIZE X	PART NO. RS2B-XX-SG-30		REV -
		REF: S00032T	SCALE: NTS	SHEET 1 OF 1	